


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by Alonzo Gesner under GLO contract number 683 dated June 7, 1898. Surveyor General record states:

Set a fir post 5 ft long 4 ins sqr for 1/4 sec cor from which;

- A spruce 8 in diam bears N22°30'E 30 lks dist
- A black pine 13 in diam bears N18°30'W 19 lks dist

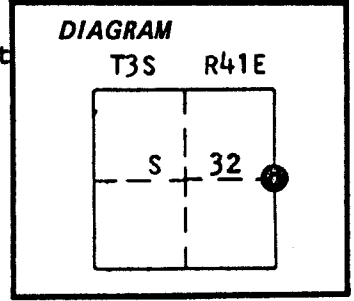

No record of subsequent remonumentation found in county records.
Description of corner evidence found:

Charred remains of post in small mound of stone.

Remains of 8" spruce bears N 18 1/2° W, 19 lks, dead and down rotting, blazes evident with dim scribing.

See map of survey number 29-86 filed in the office of the Union County Surveyor
Description of monument and accessories I established to perpetuate the original location of this corner: At the post position, I set a 2 1/2"x30" aluminum pipe with aluminum cap marked as shown 28 inches in the ground and raised a small mound of stone around cap, from which:


A 7 inch Tamarack bears N 57° E, 35.20 feet, marked 1/4 S33 BT.

A 14 inch Tamarack bears S 40° W, 36.18 feet, marked 1/4 S32 BT.

Set a steel fence post approximately 5 feet North with a 54-9 sign attached.

Corner set: 9/2/86

Witness: Greg Blackman, Rick Robinson

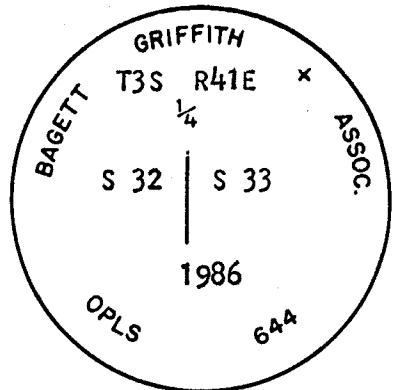

REGISTERED PROFESSIONAL LAND SURVEYOR

Duane I. Griffith

OREGON
JULY 10, 1964
DUANE I. GRIFFITH
644

Brass washer marked OPLS 644 nailed to BT blaze. Used steel tape and magnetic compass with 20° East declination. Distances to the BTs are to a 50d spike set in right side of tree when facing tree, unless otherwise stated.

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of..... 19.....

(COUNTY OFFICIAL)

UNION COUNTY SURVEYOR

(DEPUTY)

Form R6-7100-57 (9/71)

Date Received 10-20-86

Date Filed 10-27-86

By G. LANGLITZ, DEPUTY

File No. 233-86 R

☆U.S. GOVERNMENT PRINTING OFFICE - 1983-793-276

V-1

Subdivision of Section 32,
T. 3 S., R. 41 E., Willamette Meridian, Oregon

| | |
|------|--|
| FEET | <p>A Douglas fir, 9 ins. diam., bears S. 44° E., 11.8 ft. dist., mkd. C 1/4 S32 BT.</p> <hr/> <p>N. 0° 48' 18" W., beginning new measurement.</p> <p>160 Dirt road, 16 ft. wide, bears N. 72° E. and S. 72° W.</p> <p>2614.37 The 1/4 sec. cor. of secs. 29 and 32, remonumented by Griffith in 1986; monumented with an aluminum pipe, 2 1/2 ins. diam., firmly set, flush with surface of ground, with aluminum cap, 2 1/2 ins. diam., mkd.</p> <p style="text-align: center;">T 3 S R 41 E S 29 1/4 S 32 1986</p> <p>from which the remains of an original bearing tree</p> <p>A rotted tamarack stump, 24 ins. diam., bears S. 63 1/2° E., 29.0 ft. dist., with fragmentary scribe marks visible on partially healed blaze.</p> <p>and bearing trees mkd. by Griffith</p> <p>A tamarack, 24 ins. diam., bears N. 67 1/4° E., 68.4 ft. dist., with healed blazes at waist height and the base.</p> <p>A tamarack, 15 ins. diam., bears S. 50° E., 137.1 ft. dist., with healed blazes at waist height and the base.</p> <p>The original stone, 20 x 13 x 8 ins., was found buried alongside to the west of the aluminum pipe.</p> <p>A metal fence post bears E., 5.0 ft. from cor.</p> |
|------|--|

UNION COUNTY SURVEYOR

Date Received 3/8/13

Date Filed 3/8/13

By [Signature] Deputy

File No. 194-20132

From the 1/4 sec. cor. of secs. 32 and 33, remonumented by Griffith in 1986; monumented with an aluminum pipe, 2 1/2 ins. diam., firmly set, flush with surface of ground, with collar of stone, with aluminum cap, 2 1/2 ins. diam., mkd.

T 3 S R 41 E
1/4
S 32 | S 33
1986

from which the remains of an original bearing tree

Subdivision of Section 32,
T. 3 S., R. 41 E., Willamette Meridian, Oregon

| FEET | |
|---------|---|
| | <p>A dead and down rotted log, size indeterminate, bears N. 18 1/2° W., 13.6 ft. dist., with illegible scribe marks visible on discernable blaze. (Record, 12.5 ft.)</p> <p>and bearing trees mkd. by Griffith</p> <p>A tamarack, 10 ins. diam., bears N. 57° E., 35.2 ft. dist., with healed blazes at waist height and base.</p> <p>A tamarack, 16 ins. diam., bears S. 40° W., 36.1 ft. dist., with healed blazes at waist height and base.</p> <p>N. 89° 38' 20" W., on the E. and W. center line of sec. 32.</p> |
| 2598.76 | The center 1/4 sec. cor. of sec. 32. |
| | N. 89° 40' 12" W., beginning new measurement. |
| 170 | Dirt road, 15 ft. wide, bears N. 10° E. and S. 10° W. |
| 2558.19 | The 1/4 sec. cor. of secs. 31 and 32. |

UNION COUNTY
SURVEYOR

Date Received 3/8/13

Date Filed 3/8/13

By [Signature]

File No. 194-2013R