


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by Alonzo Gesner under GLO contract number 683 dated June 7, 1898. Surveyor General record states: Set a basalt stone 16"x14"x3" for closing corner to sections 31 and 32, from which:

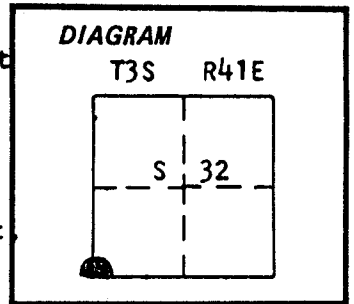

A Yellow Pine 26 inches in diameter bears N 2°30' E, 47 lks. dist.
A Red Fir, 10 inches in diameter bears N 33° W, 27 lks. dist.

No record of subsequent remonumentation found in county records.

Description of corner evidence found:

Found a stone 16"x14"x3" with a "C" visible.

Found a Ponderosa Pine stump badly rotted which bears N 2½° E, 47 lks.

Found a stump hole N 33° W, 27 lks.

See map of survey filed number 29-86 in the Union County Surveyors Office.

Description of monument and accessories established to perpetuate the

original location of this corner: At position determined by survey on the true Township line, I set a 2½"x30" aluminum pipe with aluminum cap marked as shown, 24 inches in the ground and raised a mound of stone with a 3 foot base to top of cap from which:

A 7 inch Lodgepole Pine bears N 31° E, 2.31 feet, marked CC S32 BT.


A 9 inch Lodgepole Pine bears N 50° W, 7.65 feet, marked CC S31 BT.

The original stone was South 0°25'25" East, 2.66 feet from the amended monument Set steel fence post approximately 5 feet East with a 54-9 sign attached.

Buried stone South of Pipe.

Corner set 8/21/86

Witness: Greg Blackman, Rick Robinson, Greg Blackman Jr.

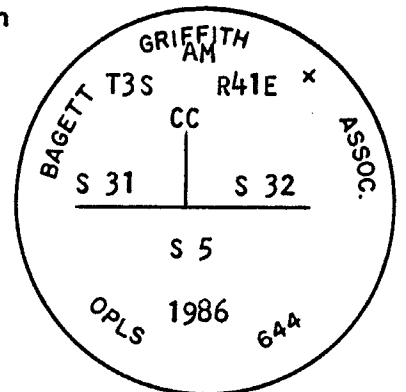

REGISTERED PROFESSIONAL LAND SURVEYOR

Duane I. Griffith

OREGON
JULY 10, 1964
DUANE I. GRIFFITH
644

Brass washer marked OPLS 644 nailed to BT blaze. Used steel tape and magnetic compass with 20° East declination. Distances to the BTs are to a 50d spike set in right side of tree when facing tree, unless otherwise stated.

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....

.....
(COUNTY OFFICIAL) UNION COUNTY SURVEYOR (DEPUTY)

Form R6-7100-57 (9/71)

Date Received 10-20-86

Date Filed 10-27-86

By G. LANGRISH DEAN

File No. 235-86R

☆ U.S. GOVERNMENT PRINTING OFFICE - 1983-793-276

Dependent Resurvey of a Portion of the North Boundary,
T. 4 S., R. 41 E., Willamette Meridian, Oregon

UNION COUNTY SURVEYOR	
Date Received	3/8/13
Date Filed	3/8/13
By	<i>[Signature]</i> DEPUTY
File No.	196-2013R

A rock outcrop, 6 x 8 x 4 ft. high, bears S. 80° E.,
9.2 ft. dist., with X BO visible on deteriorated face.

A rock outcrop, 5 x 8 x 4 ft. high, bears S. 36° W.,
21.9 ft. dist., with X BO visible on deteriorated face.

A metal fence post bears E., 4 ft. from the cor.

N. 89° 39' 59" W., beginning new measurement.

475

Dirt road, 10 ft. wide, bears N. 12° E. and S. 10° E.

806.37

The closing cor. of secs. 31 and 32, on the S. bdy. of T. 3 S.,
R. 41 E., established by Griffith in 1986, recovered and
utilized by Griffith in 1988 and by Blackman in 1988, and is
accepted as the corner; monumented with an aluminum pipe, 2 1/2
ins. diam., firmly set, projecting 2 ins. above ground, in a
collar of stone, with aluminum cap, 2 1/2 ins. diam., mkd.

AM
T 3 S R 41 E
CC
S 31 | S 32

S 5
T 4 S
1986

from which the remains of bearing trees mkd. by Griffith

An uprooted dead and down lodgepole pine, 10 ins. diam.,
bears N. 20° E., 2.7 ft. dist., with scribe marks CC S32
at waist height and BT at base visible on open blazes
with nail and flasher at base.

An uprooted dead and down lodgepole pine, 9 ins. diam.,
bears N. 62° W., 4.7 ft. dist., with scribe marks CC S31
at waist height and BT at base visible on open blazes
with nail and flasher at base.

and new bearing trees

A lodgepole pine, 8 ins. diam., bears N. 42° E.,
30.9 ft. dist., mkd. T3S R41E S32 CC BT.

A white fir, 6 ins. diam., bears N. 31° W.,
17.0 ft. dist., mkd. T3S R41E S31 CC BT.

Remove the marks AM from cap and add the marks BLM 2008.

A metal fence post bears E., 3.5 ft. from the cor.

T3S41205

Dependent Resurvey of a Portion of the North Boundary,
T. 4 S., R. 41 E., Willamette Meridian, Oregon

F E E T

From this point, the original closing cor. of secs. 31 and 32, T. 3 S., R. 41 E., perpetuated by Griffith in 1986, who found the original stone at this location and reported burying it alongside the aluminum pipe for the closing cor. of secs. 31 and 32, bears S. 0° 25' 24" E., 2.66 ft. dist.; monumented with a 60d nail, with flagging, firmly set, flush with surface of ground, from which the remains of an original bearing tree

A burned rotted stump, size indeterminate, bears N. 2 1/2° E., 31.0 ft. dist., with hack marks visible at the base.

At the corner point

Set an iron rod, 5/8 in. diam., 16 ins. long, 16 ins. in the ground. Dispose of the 60d nail.

N. 89° 40' 36" W., beginning new measurement.

514.44

The cor. of secs. 5 and 6 only, remonumented by Griffith in 1986, recovered and utilized by Griffith in 1988 and by Blackman in 1988; monumented with an aluminum pipe, 2 1/2 ins. diam., firmly set, flush with surface of ground, in a collar of stone, with aluminum cap, 2 1/2 ins. diam., mkd.

T 3 S R 41 E
S 31

S 6 S 5
T S
1986

from which the remains of an original bearing tree

A rotted tamarack stump, 18 ins. diam., bears S. 60° W., 4.3 ft. dist., no marks visible. (Record, 7.9 ft.)

and bearing trees mkd. by Griffith

A tamarack, 12 ins. diam., bears S. 62 3/4° E., 14.8 ft. dist., with healed blazes at waist height and the base.

A double trunk fir, 22 ins. diam., bears S. 54° W., 26.2 ft. dist., with healed blazes at waist height and the base.

A metal fence post bears E., 5 ft. from the cor.

UNION COUNTY SURVEYOR	
Date Received	<u>3/8/13</u>
Date Filed	<u>3/8/13</u>
By	<u>[Signature]</u> DEPUTY
File No.	<u>196-20132</u>