


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:
Corner established in 1884 by Frank W. Campbell
under General Land Office contract number 498.
Surveyor General record states:

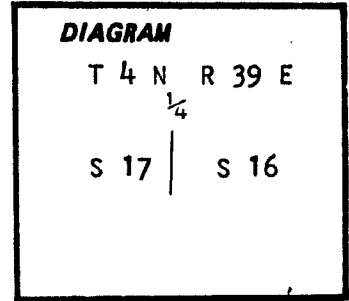

Set a basalt stone 10"x10"x10", 7 inches in the ground for 1/4 section corner, marked 1/4 on the West face.

From which:

A Fir 8 inches in diameter bears S 45°E, 92 lks. distant, marked 1/4 S BT.

A Fir 6 inches in diameter bears N 55°W, 86 lks. distant, marked 1/4 S BT.

No record of subsequent monumentation found in County Records.
Description of corner evidence found:

NONE


See map of survey dated July 1985, filed with Union County Surveyor.
Description of monument and accessories established to perpetuate the original location of this corner: At proportionate distance, I set a 2 1/2"x30" aluminum pipe with aluminum cap marked as shown, 22 inches in the ground and raised a mound of stone.

From which;

A 30 inch diameter Red Fir bears S 40°E, 25.0 feet, marked 1/4 S 16 BT. , on a single blaze.

A 17 inch diameter Red Fir bears S 87° W, 15.5 feet, marked 1/4 S 17 BT. on a single blaze.

I placed a steel fence post 5 feet North with a 54-2 and 54-4 sign attached. I also placed a fence post 5 feet South with a 54-2 sign attached.

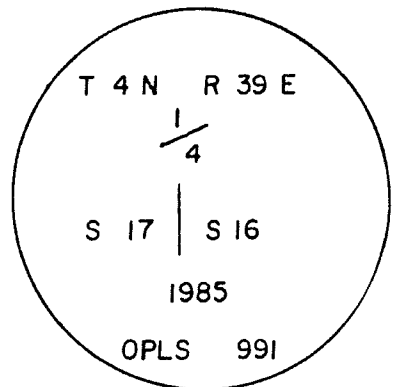

Corner set July 8, 1985
Witness: Rick Robinson

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Gregory T. Blackman

OREGON
JULY 13, 1973
GREGORY T. BLACKMAN
Office 991

Brass washer nailed to BT blaze.
Used steel tape and magnetic compass
with 20° East declination.
Measured to center of new B.T.s

..... County of.....
State of....., I hereby certify that the within instrument was filed in this office
for record on the..... day of....., 19.....
..... by
(COUNTY OFFICIAL) (DEPUTY)

Form R6-7100-57 (9/71)

UNION COUNTY SURVEYOR	
Date Received	<u>7-23-85</u>
Date Filed	<u>8-7-85</u>
By	<u>G. LANGLITZ, DEPUTY</u>
Filo No.	<u>45-85 R</u>