

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

N-9

History of original corner establishment:

Corner established by John W. Campbell under Contract No. 498, dated March 10, 1884, pages 75 and 76 of the Government Field Notes for T 4N, R 39E.

North between 20 and 21.


80.00' Set a spruce post 4' long 4" square 24" in ground.

A spruce 16" in diam. bears N 75° E 20 lks.

A spruce 11" in diam. bears S 60° E 55 lks.

A tamarack 18" in diam. bears S 30° W 12 lks.

A spruce 10" in diam. bears N 20° W 24 lks.

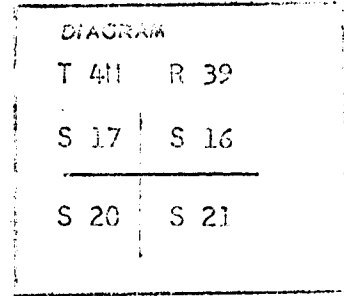

No record of subsequent remonumentation found in County Records.

Description of corner evidence found:

I found the 16" in diam. spruce bearing N 75° E 20 lks. in good shape. Its present diameter is 39".

I found the 11" diam. spruce bearing S 60° E 55 lks. in good shape. Its present diameter is 29".

I found the 18" in diam. tamarack bearing S 30° W 12 lks. to be down.

I found the rotted remains of the 4" post.

Description of monument and accessories I established to perpetuate the original location of this corner

At the position described above, I set a 2½" x 30" iron pipe 24" in the ground with a brass cap marked as shown.


From which I scribed:

A pin 25" in diam. bears N 34° W 30.0'.

A tamarack 21" in diam. bears S 46° W 26.6'.

I placed BT posters, warning posters, and brass washers on all 4 BTs. I painted scribing red and a 6" red ring around each BT. I set a fence post with warning sign 2' West of the brass cap.

This corner set June 27, 1979. Witness by Patrick L. Murphy.

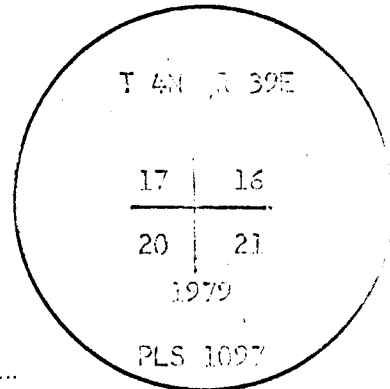

Office of _____ County Surveyor _____ County of _____ Union _____
 State of _____ Oregon _____, I hereby certify that the within instrument was filed in this office
 for record on the _____ day of _____ .
 _____ by _____ (DEPUTY)
 (COUNTY OFFICIAL)

UNION COUNTY SURVEYOR

Date Received _____

Date Filed _____

By _____

File No. 13-83 R

REGISTERED
 PROFESSIONAL
 LAND SURVEYOR

James H. Burdman

OREGON
 JULY 28, 1979
 JAMES H. BURDMAN
 1097