

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


N-13

History of original corner establishment:

Corner established by John W. Campbell, under Contract No. 498, dated March 10, 1884, page 55 of the Government Field Notes for T 4N R 39E.

North between Secs. 21 and 22
80.00' set a spruce post 4' long 4" square 24" in ground.

- A fir 5" in diam. bears N 26° E 10 lks.
- A tamarack 18" in diam. bears S 31° E 21 lks.
- A tamarack 12" in diam. bears S 20° W 9 lks.
- A fir 8" in diam. bears N 24° W 10 lks.

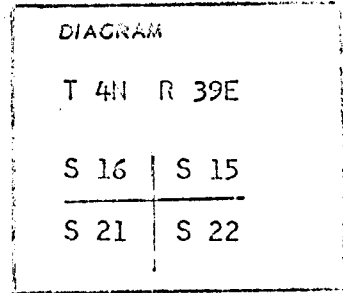

No record of subsequent remonumentation found in County Records.

Description of corner evidence found:

I found the 18" diam. tamarack S 31° E 21 lks. This BT is down.

Description of monument and accessories I established to perpetuate the original location of this corner


At the position described above, I set a 2½" x 30" iron pipe 24" in ground with a brass cap marked as shown:

From which I scribed:

- A fir 9" in diam. bears N 30° W 9.8' scribed T 4N R 39E S 16 BT
- A fir 30" in diam. bears N 28° E 14.0' scribed T 4N R 39E S 15 BT
- A fir 21" in diam. bears S 07° W 31.7' scribed T 4N R 39E S 21 BT
- A fir 11" in diam. bears S 27° E 47.5' scribed T 4N R 39E S 22 BT

I placed BT posters, warning posters, and brass washers on all four BTs. I painted scribing red and painted 6" red ring around each BT. I set a fence post with a warning poster 2' W of the brass cap.

This corner set June 27, 1979. Witness by Patrick L. Murphy.

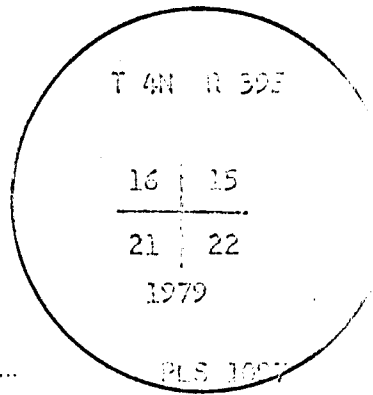

Office of..... County Surveyor..... County of..... Union.....
 State of..... Oregon....., I hereby certify that the within instrument was filed in this office
 for record on the day of.....
 _____ by _____
 (COUNTY OFFICIAL) (DEPUTY)

UNION COUNTY SURVEYOR

Date Received _____

Date Filed _____

By _____

File No. 14-83 R

REGISTERED PROFESSIONAL LAND SURVEYOR

James H. [Signature]

State of Oregon
 Surveyor General