


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

INDEX: N 21

History of original corner establishment:

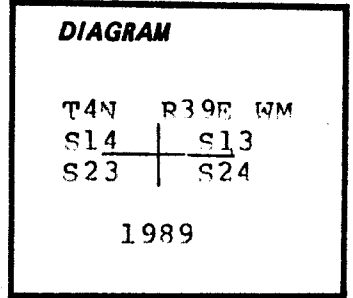

A. Corner established by US Deputy Surveyor Frank W. Campbell working under contract numbered 498, dated March 10, 1884.

Surveyor General's Record states:
 Set a basalt stone 13x10x10 ins
 9 ins in ground for cor to secs
 13,14,23 & 24 marked with 3 notches on S & 1 notch on E edges;
 from which
 A fir 20 ins dia brs N19E 96 lks dist marked T4N R39E S13 BT
 A fir 12 ins dia brs S8E 94 lks dist marked T4N R39E S24 BT
 A pine 24 ins dia brs S60W 53 lks dist marked T4N R39E S23 BT
 A fir 24 ins dia brs N83W 53 lks dist marked T4N R39E S14 BT

Description of corner evidence found:

B. MONUMENT FOUND:


none; steep rocky hillside with many stones but no marked stone found

ACCESSORIES FOUND:

Found 27 in dia douglas fir bears S8E at 56.3 feet with healed blaze (did not open). (record distance of 63.36 ft checks as slope distance)
 Found 29 in dia ponderosa pine bears S60W at 34.4 feet (record 34.98 ft) with visible scribing of "4NR39E S"
 Found fir root collar bears N88W at 35.2 ft (record 34.98 ft)
 Found fir stump burned with axe marks bears N19E at 63.1 ft (record 63.36 ft)

Description of monument and accessories I established to perpetuate the original location of this corner:

C. I set a 2.5 inch dia. by 30 inch long aluminum monument 18 inches in the ground in a mound of stone. As found evidence agrees with GLO record (and using slope distance from one BT) I set the monument at locus of all distance measurements. I mark the cap:



STRYKER PLS 2060

NEW ACCESSORIES ESTABLISHED with magnetic declination of 20 deg. East

13" douglas fir bears N44W at 29.2 ft scribed "T4N R39E S14 BT"
 18" douglas fir bears N17E at 65.3 ft scribed "T4N R39E S13 BT"

Painted red band around each bearing tree
 Placed brass washer with "PLS 2060" at base of each new BT blaze
 Placed USDA Forest Service metal signs 54-3 (BT) and 54-9 (LSM) on each bearing tree. Placed 54-9 (LSM) sign on steel fence post 2 feet south of corner. Placed 54-4 (ATTENTION) sign on BT remains

Office of..... County of.....
 State of....., I hereby certify that the within instrument was filed in this office
 for record on the..... day of....., 19.....

(COUNTY OFFICIAL)

by _____

UNION COUNTY SURVEYOR

Date Received 10-2-89

Date Filed 10-11-89

By G. LANGLITZ

File No. 196-89 R

REGISTERED PROFESSIONAL LAND SURVEYOR

Edwin A. Stryker

OREGON
 JULY 15, 1983
 EDWIN A. STRYKER
 2060