

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

R-21


History of original corner establishment:

Corner established in 1884 by Frank W. Campbell under Contract No. 498.

80.00 ch. Set a basalt stone 17" x 10" x 8" 11" in the ground marked with 2 notches on South and 1 notch on East.

From which:

- A fir 12" in diameter bears N 84° E 98 lks. marked T 4N R 39E S 24 BT.
- A pine 18" in diameter bears S 68° E 50 lks. marked T 4N R 39E S 25 BT.
- A fir 24" in diameter bears S 10° W 65 lks. marked T 4N R 39E S 26 BT.
- A fir 8" in diameter bears N 70° W 146 lks. marked T 4N R 39E S 23 BT.

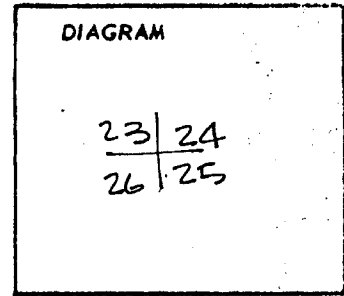

Description of corner evidence found:

- Found the notched stone:
- Found the BT Southeast, now 36" in diameter in good condition.
- Found the BT Southwest, now 28" in diameter in good condition.
- Found the BT Northwest, now 24" in diameter in good condition.


Description of monument and accessories I established to perpetuate the original location of this corner

At the position described above, I set a 2½" x 30" iron pipe 24" in the ground with a brass cap marked as shown:

From which I scribed BTs:

A fir 12" in diameter bears N 33° E 12.0' marked T 4N R 39E S 24 BT.

- I nailed a brass washer marked OPLS 1097 to BT blazes.
- I set a steel fence post adjacent with signs 54-4 and 54-9.
- I painted a red band around BTs and face of scribe.
- I used a steel tape and magnetic compass with 19° East variation and measured a horizontal distance to the center of the BTs.
- This corner was set April 15, 1980. Witness by Patrick L. Murphy.
- See map of survey.

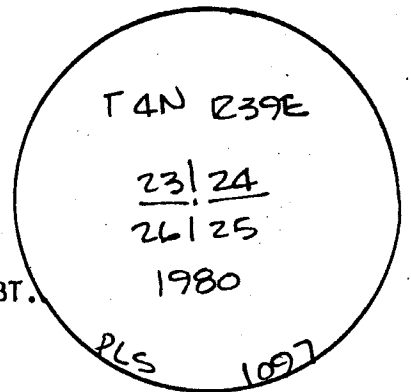

REGISTERED PROFESSIONAL LAND SURVEYOR

James H. Buisman

OREGON
JULY 22, 1977
JAMES H. BUISMAN
1097

Office of Surveyor County of Union
 State of Oregon, I hereby certify that the within instrument was filed in this office
 for record on the 22 day of May 1980
James V. Wells by J. L. Miller
 (COUNTY OFFICIAL) (DEPUTY)

UNION COUNTY SURVEYOR

Date Received _____

Date Filed _____

By _____

File No. 15-83 R