

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

X-17


History of original corner establishment:

Corner established in 1884 by Frank W. Campbell under Contract No. 498.

40.00 ch. set a pine post 3' long, 3" square, 24" in the ground marked 1/4 S on West face.

From which:

A tamarack 8" in diameter bears N 79°W 34 lks. marked 1/4 S BT.
A tamarack 6" in diameter bears S 80°E 14 lks. marked 1/4 S BT.

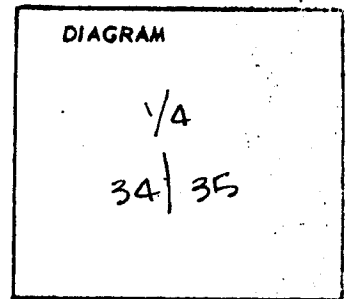

Description of corner evidence found:

No evidence found.

Description of monument and accessories I established to perpetuate the original location of this corner


At the position described above, I set a 2 1/2" x 30" iron pipe 28" in the ground with a brass cap marked as shown:

From which I scribed BTs:

A fir 18" in diameter bears N 36° W 22.8' marked 1/4 S BT.
A fir 15" in diameter bears N 61° E 29.7' marked 1/4 S BT.

I nailed a brass washer marked OPLS 1097 to BT blazes.
I set a steel fence post 3' North and South with signs 54-2, 54-4, and 54-9.
I painted a red band around BTs and face of scribe.
I used a steel tape and magnetic compass with 19° East variation and measured a horizontal distance to the center of the BTs.

This corner was set April 23, 1980. Witness by Patrick L. Murphy. See map of survey.

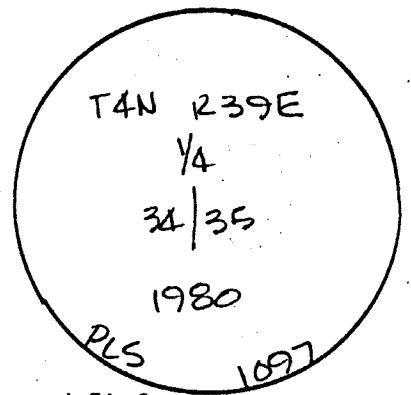

REGISTERED PROFESSIONAL LAND SURVEYOR

James H. Buisman

OREGON
JULY 22, 1977
JAMES H. BUISMAN
1097

Office of Surveyor County of Union
State of Oregon, I hereby certify that the within instrument was filed in this office for record on the 11 day of May, 1980.
James Welch (COUNTY OFFICIAL) by J. L. Lelley (DEPUTY)

UNION COUNTY SURVEYOR
Date Received _____
Date Filed _____
By _____
File No. 20-83 R