


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by Frank W. Campbell under GLO contract number 507, dated June 28, 1884. Surveyor General record states:

As there is an impassable canyon North where the 1/4 sec corner will be, I set a basalt stone 16x12x12 ins 12 ins in the ground for witness corner to said 1/4 sec corner marked WC 1/4 on W face, from which;

A pine 24 ins diam bears S50°E 19 lks dist marked WC 1/4 S BT.
A pine 20 ins diam bears S64°W 152 lks dist marked WC 1/4 S BT.

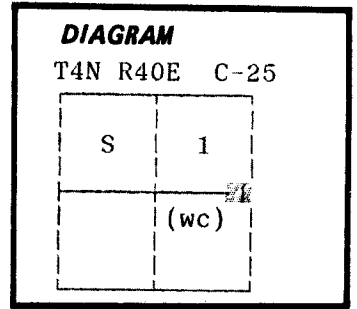

Corner witnessed by Alfred A. Morrill, under GLO contract number 755, dated June 11, 1904. Surveyor General record states; Intersect W bdy of Twp. 2.87 chs North of WC on E bdy of sec 1, which is a stone firmly set marked and witnessed as described by the Surveyor General. I obliterate all the marks on bearing tree pertaining to secs in T4S R41E.

No record of subsequent monumentation found in Wallowa County survey records.

Description of corner evidence found:

Found a stone 14x11x11 inches marked 1/4

Found the rotted and burned remains of a Ponderosa Pine stump S50°E, 19 lks with no scribes visible.

Found a 36 inch diameter Ponderosa Pine bears S70°W (record S64°E), 152 lks live and vigorous with scribes visible.

UNION COUNTY SURVEYOR

Data Received 9-15-88

Date Filed 9-15-88

By G. LANGLITZ, Deputy

File No. 129-88R

Description of monument and accessories I established to perpetuate the

original location of this corner:

In place of the found original corner stone, I set a 2 1/2" x 30" aluminum pipe with aluminum cap marked as shown, 12 inches in the ground, from which:

New BTs:

A 18x24 inch exposed South rock face bears N28°W, 35.02 feet marked + B0 at top center.

Raised a mound of stone around monument, 5 ft. base to top of cap.


Painted a 6 inch red band around all BTs and attached 54-3 and 54-9 signs.

Set a steel fencepost approximately 5 feet North with 54-9 sign attached.

Buried the original corner stone West and alongside of monument.

I hereby certify that the above corner point was perpetuated as hereon described on June 15, 1988.

Witnesses: Jeff Petersen and Rick Robinson

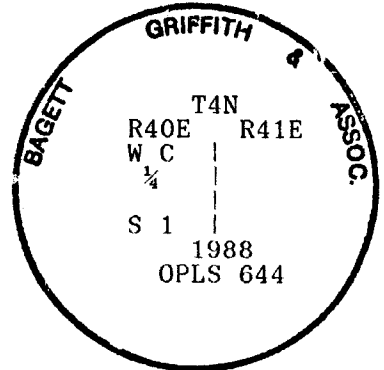

REGISTERED PROFESSIONAL LAND SURVEYOR

OREGON
JULY 10, 1964
DUANE I. GRIFFITH
644

I used a steel tape and magnetic compass in the establishment of new accessories. I used 20° East magnetic declination and the distances are to a 50d spike driven in the right side of the root crown on the BT and to the "+" chiseled on the B0. I attached a brass washer marked OPLS 644 to the BT blaze.

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....

..... by
(COUNTY OFFICIAL) (DEPUTY)