


K-4

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

**History of original corner establishment:**

Unsurveyed - subdivided section.



**Description of corner evidence found:**

No evidence found.

**Description of monument and accessories I established to perpetuate the original location of this corner:**

At the position described above, I set a 2 1/2" x 30" iron pipe 26" in the ground, with a brass cap marked as shown:

From which I scribed BT's:

A Fir 10" in dia. bears S 39°W a distance of 18.80 ft.

A Fir 17" in dia. bears N 19°W a distance of 10.90 ft.

I nailed a brass washer marked PLS 933 to the BT blazes.


I set a steel fence post 5' South and West with signs 54-2, 54-9 and 54-4.

I painted a red band around the BT's and face of scribe and nailed signs 54-3 and 54-9 to them.

I used a steel tape and a magnetic compass with a 19°30' East variation and measured a horizontal distance to the center of BT's with a steel chain.

This corner was set July 29, 1983

Witness: by: W. Keith Sands  
Brent Reynolds

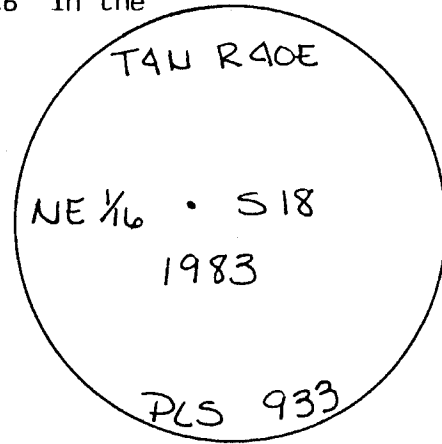

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*David H. Krumbain*

OREGON  
JULY 17, 1970  
DAVID H. KRUMBAIN  
933

Office of.....County Surveyor..... County of.....Union.....  
State of.....Oregon..... I hereby certify that the within instrument was filed in this office  
for record on the..... day of....., 19.....  
..... by .....  
(COUNTY OFFICIAL) (DEPUTY)

Form R6-7100-57 (9/71)

SEE SURVEYS - 37-83  
- 38-83

UNION COUNTY  
SURVEYOR

Date Received 9-26-83  
Date Filed 9-28-83  
By G. LANGLITZ, DEPUTY  
File No. 357-83 R