


L-3

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Unsurveyed - subdivided section.

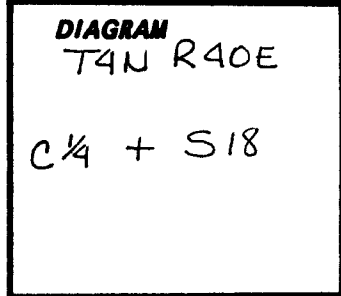

Description of corner evidence found:

No evidence found.

Description of monument and accessories I established to perpetuate the original location of this corner:

At the position described above, I set a 2 1/2" x 30" iron pipe 20" in the ground with a brass cap marked as shown and a rock mound to within 2" of top.

From which I scribed BT's:

A Fir 9 1/2" in dia. bears N 54° 30' E a distance of 28.20 ft.

A Fir 8" in dia. bears N 46° W a distance of 29.05 ft.

I nailed a brass washer marked PLS 933 to the BT blazes.


I set a steel fence post 5' North with signs 54-9 & 54-4 on it.

I painted a red band around the BT's and face of scribe and nailed signs 54-3 & 54-9 to them.

I used a steel tape and a magnetic compass with a 19° 30' East variation and measured a horizontal distance to the center of BT's with a steel chain.

This corner was set July 29, 1983

Witness by: W. Keith Sands
Brent Reynolds

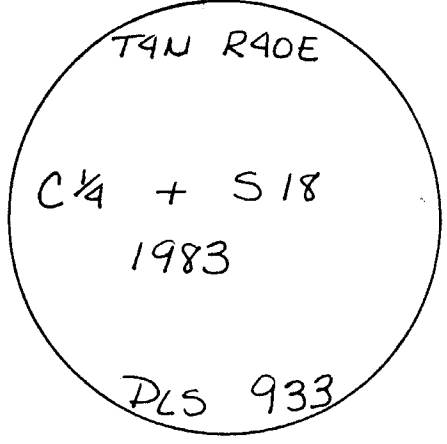

REGISTERED
PROFESSIONAL
LAND SURVEYOR

David H. Krumbein

OREGON
JULY 17, 1970
DAVID H. KRUMBEIN
933

Office of... County Surveyor..... County of..... Union.....
State of..... Oregon....., I hereby certify that the within instrument was filed in this office
for record on the..... day of....., 19.....

..... by
(COUNTY OFFICIAL) (DEPUTY)

UNION COUNTY
SURVEYOR
Date Received GPO-700-276 9-26-83
Date Filed 9-28-83
By G. LANGLITZ, DEPUTY
File No. 354-83 R

SEE SURVEYS - 37-83
-38-83