


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Unsurveyed - subdivided section.



Description of corner evidence found:

No evidence found.

Description of monument and accessories I established to perpetuate the original location of this corner:

At the position described above, I set a 2 1/2" x 30" iron pipe 26" in the ground with a brass cap marked as shown:

From which I scribed BT's:

A Fir 9 1/2" in dia. bears N 01° E a distance of 32.15 ft.
A Tamarack 21" in dia. bears S 77° E a distance of 34.70 ft.

I nailed a brass washer marked PLS 933 to the BT blazes.


I set a steel fence post 5' North and South with signs 54-2 and 54-9 on them.

I painted a red band around the BT's and face of scribe and nailed 54-3 and 54-9 signs to them.

I used a steel tape and a magnetic compass with a 19° 30' East variation and measured a horizontal distance to the center of BT's with a steel chain.

This corner was set July 28, 1983

Witness by: W. Keith Sands
Brent Reynolds

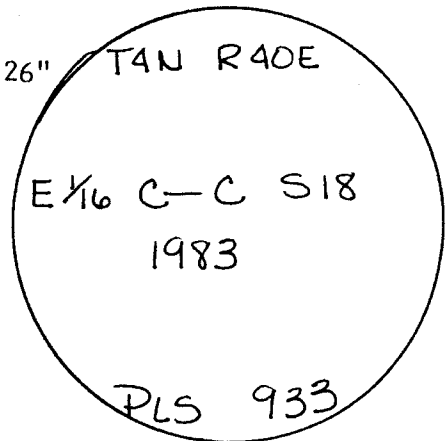

REGISTERED
PROFESSIONAL
LAND SURVEYOR

David H. Krumbein

OREGON
JULY 17, 1870
DAVID H. KRUMBEIN
933

Office of..... County Surveyor..... County of..... Union
State of..... Oregon....., I hereby certify that the within instrument was filed in this office
for record on the..... day of....., 19.....

..... by
(COUNTY OFFICIAL) (DEPUTY)

Form R6-7100-57 (9/71)

SEE SURVEYS 37-83
38-83

UNION COUNTY
SURVEYOR
Date Received 9-26-83
Date Filed 9-28-83
By G. LANGRITZ, DEPUTY
File No. 350-83 R