


**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

L-17

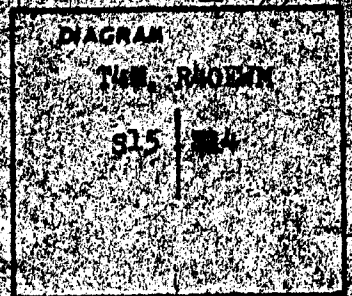


Original monument location  
 Corner established in 1888 by Federal Land Office  
 (original survey)  
 Original survey notes state:  
 19" post at the corner from which  
 19" in diameter bears S70°W a distance of 5 lks  
 scribed 1/4 SBT  
 19" in diameter bears N50°E a distance 10 lks.  
 scribed 1/4 SBT

Description of corner evidence found:  
 At recorded distance from the corner I found a 19" fir snag with scribe.  
 There was not any evidence of the other bearing tree.

Description of monument and accessories I established to perpetuate the  
 original location of this corner  
 At the position of the corner I placed a galvanized pipe 30" long with an eight  
 inch plate welded to the bottom and bronze cap on top of the pipe. The pipe  
 was set to a depth of 24" and back filled with tamped earth.

I stamped the disk →

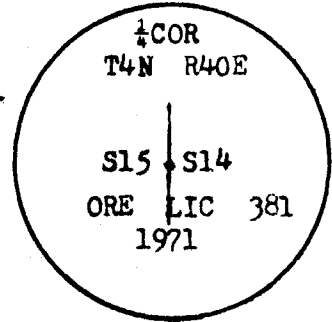

From the corner the original bearing tree is;  
 A 19" fir snag at N50°E a distance of 10 lks.  
 I established two new bearing trees;  
 A Red Fir 16" in diam. bears S80°W a distance of 45.7 feet measured to center of  
 tree and scribed 1/4 SBT; A spruce 16" in diam. bears S44°E a distance of 9 feet measured  
 to center of tree and scribed 1/4 SBT;  
 I placed a treated wood post by the corner with USFS sign 54-4 attached. USFS bearing  
 tree signs were placed on the three trees breast high facing the corner.

Office of.....County Surveyor..... County of.....Union.....  
 State of.....Oregon....., I hereby certify that the within instrument was filed in this office  
 for record on the ..19... day of .....June..... 19.71, at 8... o'clock a...m., (signed)  
 County surveyor by *James W. Shely*  
(COUNTY OFFICIAL) (DEPUTY)

**UNION COUNTY  
 SURVEYOR**

---

Date Received \_\_\_\_\_

Date Filed \_\_\_\_\_

By \_\_\_\_\_

File No. 40-83 R

RECEIVED  
 OREGON  
 LAND SURVEYOR  
*James W. Shely*  
 MAY 4 1988  
 JAMES W. MOULT  
 C.S.S.

52-1921