


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:  
Unsurveyed - subdivided section.

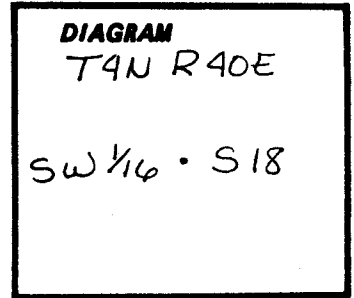

Description of corner evidence found:

No evidence found.

Description of monument and accessories I established to perpetuate the original location of this corner:

At the position described above, I set a 2 1/2" x 30" iron pipe 26" in the ground with a brass cap marked as shown:

From which I scribed BT's:

A Spruce 19" in dia. bears S 59°30'W a distance of 83.2 ft.  
A Pine 26" in dia. bears S 40°E a distance of 221.05 ft.


I nailed a brass washer marked PLS 933 to the BT blazes.  
I set a steel fence post 5' North and East with signs 54-4, 54-9 & 54-2.

I painted a red band around BT's and face of scribe and nailed signs 54-3 & 54-9.

I used a steel tape and a magnetic compass with 19°30' East variation and measured a horizontal distance to the center of the BT's.

July 21, 1983

By: W. Keith Sands  
Witness: Brent Reynolds

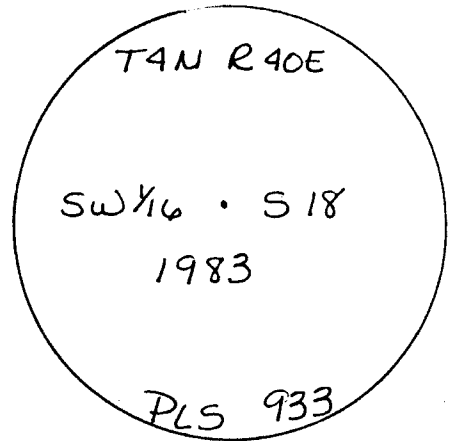

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*David H. Krumbein*

OREGON  
JULY 17, 1870  
DAVID H. KRUMBEIN  
933

Office of.....County Surveyor..... County of.....Union.....  
State of.....Oregon....., I hereby certify that the within instrument was filed in this office  
for record on the..... day of....., 19.....

..... by .....  
(COUNTY OFFICIAL) (DEPUTY)

Form R6-7100-57 (9/71)

SEE SURVEYS - 37-83  
- 38-83

UNION COUNTY  
SURVEYOR  
Date Received 9-26-83  
Date Filed 9-28-83  
By G. LANGLITZ, DEPUTY  
File No. 355-83 R