


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by Frank Campbell under GLO contract No. 507 in 1884.

Set a spruce post 3 feet long 3 ins square 24 ins in the ground mkd 1/4 on North face from which:

- A Spruce 10" dia. bears N 10°W 26 lks dist mkd 1/4 S BT
- A Spruce 10" dia. bears S 5°E 16 lks dist mkd 1/4 S BT

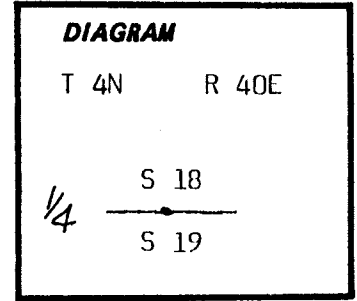

Description of corner evidence found:

Nothing was found either during the preliminary reconnaissance or after the corner location was established by single proportion.

Description of monument and accessories I established to perpetuate the original location of this corner:

At the proportioned location we set a 2 1/2" Brass Cap on a 2 1/2" x 30" galvanized iron pipe 26" in the ground, mkd as shown:


From which:

- A Fir 1 1/2" in dia. bears N 65°E a dist. of 51.20 ft. mkd 1/4 S 18 BT.
- A Fir 9" dia. bears S 45 1/2°W a dist. of 123.60 ft. mkd 1/4 S 19 BT.

- I nailed a brass washer mkd PLS 933 to the BT blazes.
- I set a steel fence post 5° East and South with signs 54-2, 54-4 and 54-9.
- I painted a red band around the BT's and face of scribes.
- I used a steel tape and a magnetic compass with a 19°30' East variation and measured a horizontal distance to the center of the BT's with a cloth tape.

This corner was set Aug. 3, 1983

By: W. Keith Sands
Witness: Brent Reynolds

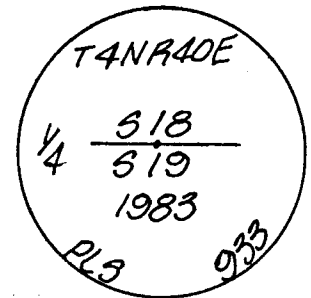

REGISTERED
PROFESSIONAL
LAND SURVEYOR

David H Krumbein

OREGON
JULY 17, 1970
DAVID H. KRUMBEIN
933

Office of.....Surveyor..... County of..... Union.....
 State of.....Oregon....., I hereby certify that the within instrument was filed in this office
 for record on the..... day of....., 19.....
 by
 (COUNTY OFFICIAL) (DEPUTY)

UNION COUNTY
SURVEYOR

Date Received 9-26-83

Date Filed 9-28-83

By G. LANGUTZ, DEPUTY

File No. 352-83 R