


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

This is the original establishment of this 1/16 corner.



Description of corner evidence found:

None

Description of monument and accessories established to perpetuate the original location of this corner

Set a 2½-inch brass cap on 2-inch iron pipe, 31 inches long, 6 inches above ground, with a 6 ft. steel fence post alongside with sign 54-4 attached.

6 " fir bears N 61° E, 17.25 ft. dist., mkd.
N 1/16 S 23 BT.

6" spruce bears S 84° W, 19.6 ft. dist., mkd.
N 1/16 S 22 BT.

Monument marked:


T 4 N R 40 E

N 1/16

S 22 | S 23

RPE 2808

1976

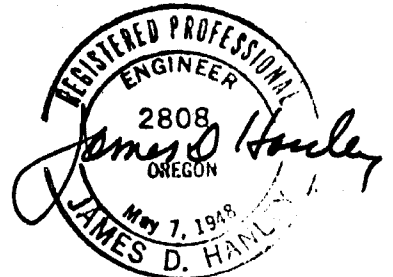

Office of Surveyor County of Union
 State of Oregon, I hereby certify that the within instrument was filed in this office
 for record on the 26 day of August, 1976
 _____ by _____
 (COUNTY OFFICIAL) (DEPUTY)

**UNION COUNTY
SURVEYOR**

Date Received _____

Date Filed _____

By _____

File No. 49-83 R

GPO 706 311