

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


History of original corner establishment:

Corner originally established by Frank Campbell under GLO contract No. 507 in 1884.

Set a Fir Post 3 feet long 3 ins square 24" in ground, mkd 1/4 on West face.

A Tamarack 12" diameter bears N 30°E 10 lks.

A Fir 6" diameter bears N 66°W 13 lks.

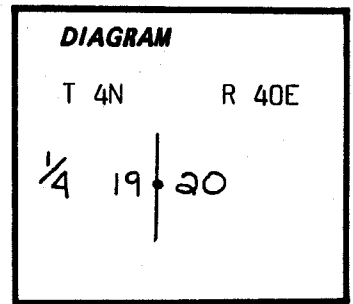

Description of corner evidence found:

None

Description of monument and accessories I established to perpetuate the original location of this corner:

Set a 2 1/2" x 30" galvanized iron pipe with 2 1/2" Brass Cap rivited to top set 26" in the ground mkd

Scribed two B.T.'s:

A Fir 17" in diameter bears S 30°W 24.0 feet.

A Fir 9 1/2" in diameter bears N 85°30'E 25.8 feet.

Set a steel post 5.0' North with signs 54-4 & 54-9.

Painted a red band around B.T.'s and face of scribe and nailed on 54-4 & 54-3. Nailed a Brass Washer mkd 933 to lower scribe.

I used a steel tape and magnetic compass with a 19°30' East variation and measured a horizontal distance with a steel tape.

July 21, 1983


By: W. Keith Sands

Witness: Brent Reynolds

REGISTERED PROFESSIONAL LAND SURVEYOR

David H. Klein

OREGON
JULY 17, 1970
DAVID H. KRUMBEIN
933

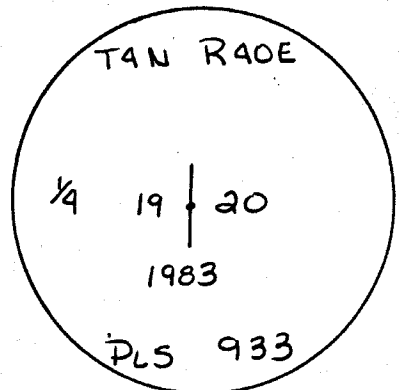

Office of..... Surveyor..... County of..... Union.....
State of..... Oregon....., I hereby certify that the within instrument was filed in this office
for record on the..... day of....., 19.....

..... by
(COUNTY OFFICIAL) (DEPUTY)

UNION COUNTY SURVEYOR

Date Received 9-26-83
790-276

Date Filed 9-28-83

By G. LANGLITZ, DEPUTY

File No. 369-83 R