


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Not Previously Set

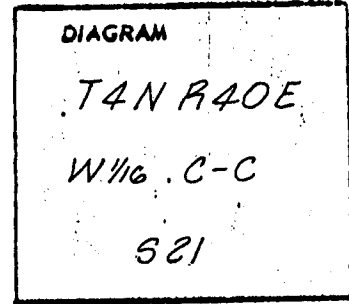

Description of corner evidence found:

None

Description of monument and accessories established to perpetuate the original location of this corner

Set 2 1/2" x 30" Galvanized Steel Pipe with 2 1/2" Brass Cap stamped as shown 26" in ground


Scribed Two Bearing Trees (CW 1/16, S21 BT)

A Fir 8" Diameter Bears N 66°E 43.75' Dist.

A Fir 7" Diameter Bears S 0 1/2°E 56.00' Dist.

Set Steel Posts 5' West and 5' South with signs #54-9 & 54-2

B.T.'s have red painted Blazes and a 6" Red Band Signs #54-9 & 54-3 and Brass Washer PLS 933 on B.T. Blazes

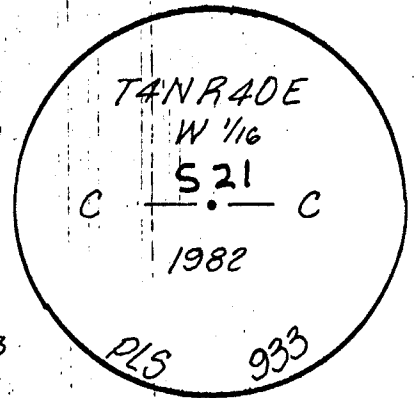

I used a Steel Tape and a Magnetic Compass with a 20° variation and measured a horizontal distance to the center of the B.T.'s

Witness by W. Keith Sands

Witness Rod D. Panches

REGISTERED PROFESSIONAL LAND SURVEYOR

*David H. Krumbein*

OREGON  
JULY 17, 1970  
DAVID H. KRUMBEIN  
933

Office of..... Surveyor..... County of..... Union.....  
 State of Oregon....., I hereby certify that the within instrument was filed in this office  
 for record on the ..... day of .....

..... by .....  
 (COUNTY OFFICIAL) (DEPUTY)

UNION COUNTY SURVEYOR

Date Received 9-26-83

Date Filed 9-28-83  
PRO 296.333

By G. LANGLITZ DEPUTY

File No. 346-83 R