


Q-9

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Not Previously Set

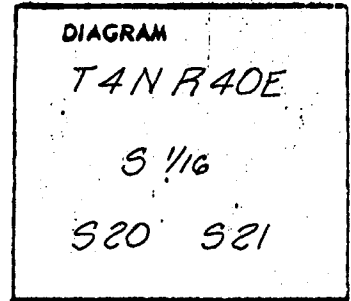


Description of corner evidence found:

None

Description of monument and accessories established to perpetuate the original location of this corner

Set 2½" x 30" Galvanized Steel Pipe with 2½" Brass Cap Stamped as shown, 26" in ground
 Scribed Two Bearing Trees
 A Fir 7" Diameter Bears S28½ W 63.0' Mkd. S1/16 S20 BT
 A Fir 12" Diameter Bears N 83E 23.5' Mkd. S1/16 S21 BT
 Set Steel Posts 5' East and 5' South with signs #54-9 & 54-2
 B.T.'s have Red Painted Blazes and 6" Red Band signs #54-9 and 54-3
 and Brass Washer PLS 933 on BT Blaze

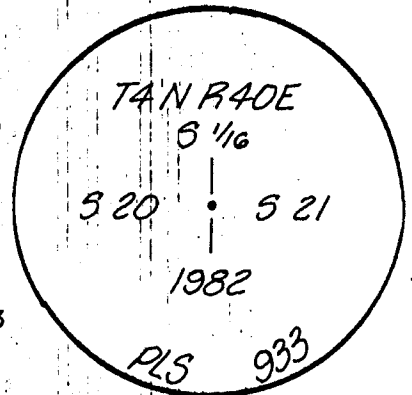

I used a Steel Tape and a Magnetic Compass with 20° variation and measured a Horizontal Distance to the Center of the B.T.'s

Witness by W. Keith Sands
Witness Rod D. Punches

REGISTERED
PROFESSIONAL
LAND SURVEYOR
David H. Krumbein
OREGON
JULY 17, 1970
DAVID H. KRUMBEIN
933

Office of Surveyor County of Union
 State of Oregon, I hereby certify that the within instrument was filed in this office
 for record on the day of
 by
 (COUNTY OFFICIAL) (DEPUTY)

SEE SURVEYS - 37-83
" " - 38-83

UNION COUNTY
SURVEYOR
Date Received 9-26-83
Date Filed 9-28-83
By G. LANGLITZ
File No. 347-83 R