


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Not Previously Set

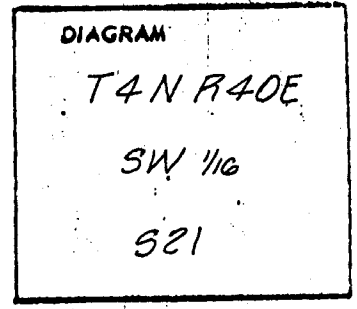


Description of corner evidence found:

None

Description of monument and accessories established to perpetuate the original location of this corner

Set 2½" x 30" Galvanized Steel Pipe with 2½" Brass Cap Stamped as shown, 26" in ground.  
 Scribed Two Bearing Trees (SW 1/16, S21 BT)  
 A Fir 12" Diameter Bears N 31½E 53.20' Distance  
 A Tamarack 14" Diameter Bears S 87½W 26.30' Distance  
 Set Steel Posts 5' North and 5' West with Signs 54-9, & 54-2  
 B.T.'s have Red Painted Blazes and 6" Red Band signs #54-3 and 54-9  
 and Brass Washer PLS 933 on B.T. Blaze.

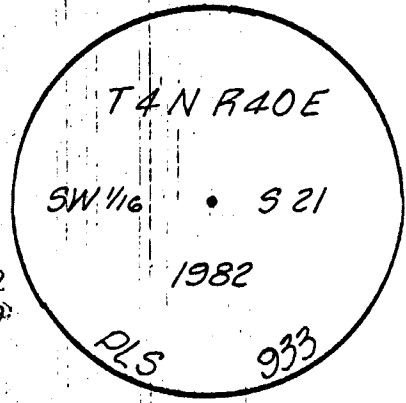

I used a Steel Tape and Magnetic Compass with 20° Variation and measured a Horizontal Distance to the center of the B.T.'s.

Witness by W. Keith Sands  
Witness Rod D. Panches

REGISTERED PROFESSIONAL LAND SURVEYOR

*David H. Krumbein*  
 OREGON  
 JULY 17, 1970  
 DAVID H. KRUMBEIN  
 933

Office of Surveyor ..... County of Union .....  
 State of Oregon ..... , I hereby certify that the within instrument was filed in this office  
 for record on the ..... day of .....  
 ..... by .....  
 (COUNTY OFFICIAL) (DEPUTY)

**UNION COUNTY SURVEYOR**

---

Date Received 9-26-83  
 Date Filed 9-28-83  
GPO 796-313

By G. LANGLITZ, DEPUTY  
 File No. 348-83 R