


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

This is original establishment of this subdivisional corner.

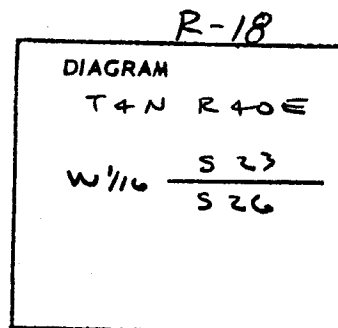

Description of corner evidence found:

None.

Description of monument and accessories established to perpetuate the original location of this corner


2½-inch brass cap on 2-inch iron pipe, 31 inches long, 6 inches above the ground, with a 6 ft. steel fence post alongside with sign 54-4 and 54-2 attached.

8-inch fir bears S 15° W, 11.3 ft. dist., mkd. W 1/16 S 26 BT.
10-inch larch bears N 01° W, 20.3 ft. dist., mkd. W 1/16 S 23 BT.

BTs have sign 54-3 attached 6 inches below band of red paint and have a brass washer mkd. RPE 2808 nailed flush with BT blaze.

Monument marked:

T 4 N R 40 E
W 1/16 S 23
 S 26
RPE 2808
1976

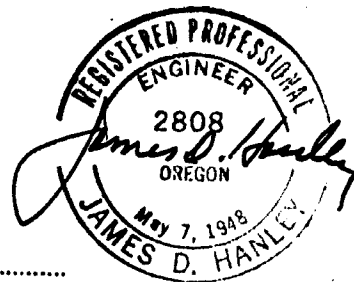

Office of Surveyor..... County of Union
 State of Oregon....., I hereby certify that the within instrument was filed in this office
 for record on the 26 day of August, 1976
 by
 (COUNTY OFFICIAL) (DEPUTY)

UNION COUNTY SURVEYOR
Date Received _____
Date Filed _____
By _____
File No. <u>69-832</u> GPO 796-333