


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

None.

Index File No S-19

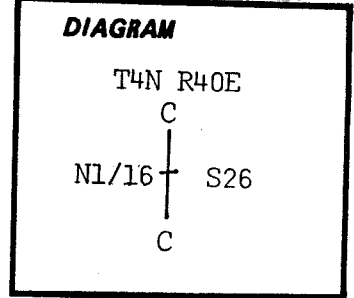

Description of corner evidence found:

None.

Description of monument and accessories established to perpetuate the original location of this corner:

At surveyed point set 2 1/2" x 30" galvanized pipe and brass cap marked: Set pipe 25" in the ground . No rock in the area.

From which by magnetic declination of N20°E:


A 12" Tamarac bears N63°E., 16.6 ft. scribed CN1/16S26 BT.

A 20" Tamarac bears S26°E., 51.5 ft. scribed CN1/16S26 BT.

Painted blazes red and 6" red band around.

Placed 54-3s, 54-9s and brass washers marked PLS 1051 on BTs.

Placed 54-2 and 54-9 on steel fence post 5' south and 54-2 on steel fence post 5' west of the corner.

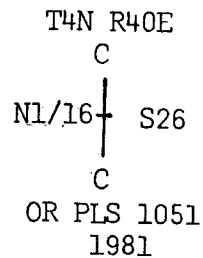

I hereby certify that the above corner monument was established as herein described.

Witnesses: Daniel Rowland
Beverly Weaselhead

June 17, 1981

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Barry B. Barbour

OREGON
OCT. 17, 1975
BARRY B. BARBOUR
1051

Office of..... County Surveyor..... County of..... Union.....

State of..... Oregon..... I hereby certify that the within instrument was filed in this office

for record on the 24 day of August, 1981.

HOWARD L. PEREX
(COUNTY OFFICIAL)

by *Harry J. Langlet*
DEPUTY

UNION COUNTY SURVEYOR

Date Received _____
☆ GPO—798-276

Date Filed _____

By _____

File No. 78-83R