


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

V-15'

History of original corner establishment:

Deputy F.W. Campbell in 1884 under Contract No. 507
Set a fir post
Marked: 10" Spruce N49W 10 lks.
10" Spruce S11E 35 lks.

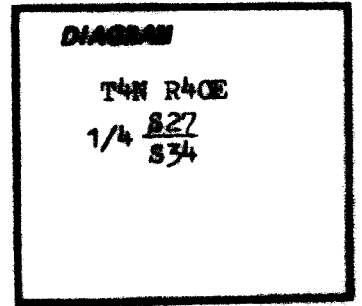

Description of corner evidence found:

Searched for--not found--set at proportion

Description of monument and accessories | established to perpetuate the original location of this corner:

Set 2 1/2" X 30" Alum. pipe and cap with a magnet
Marked: 16" Wh. Fir N5 1/2 W 54.2' scribed 1/4 S27 BT
9" " " N19 3/4 E 30.3' scribed 1/4 S27 BT
36" " " S76 1/2 E 10.5' scribed 1/4 S34 BT
10" " " S32 1/2 E 26.3' " "

Stamped: T4N R4E
1/4 S27 S34
1991
LS 896

UNION COUNTY SURVEYOR
Date Received 1-21-92
Date Filed 1-22-92
By *Mary T. Clark*
File No. 010-1992 R

REGISTERED PROFESSIONAL LAND SURVEYOR

Larry D. Bishop

OREGON JULY 11, 1989 LARRY D. BISHOP 898

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....
..... by
(COUNTY OFFICIAL) (DEPUTY)