


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by Alfred A. Morrill under GLO contract number 755, dated June 11, 1904. Surveyor General record states:

At point of intersection, I set a basalt stone, 16x10x8 ins, 12 ins in the ground for closing corner of secs 6 and 7 marked CC on E with one groove on N and 5 grooves on S faces. Raised a mound of stone 3 ft base, 2 ft high, 6 ft E of corner.

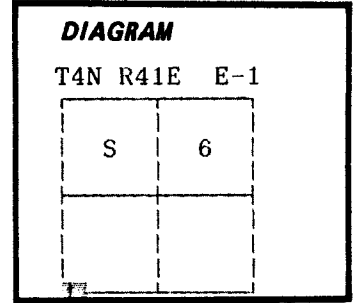

No record of subsequent monumentation found in Wallowa County survey records.

Description of corner evidence found:

Found mound of stone.

Found stone 26x16x12 inches marked with 5 grooves on one face (other side of stone sluffed off)
Stone was loose on the ground in East edge of mound of stone.

UNION COUNTY SURVEYOR	
Date Received	<u>9-15-88</u>
Date Filed	<u>9-15-88</u>
By	<u>G. LANGLITZ, Deputy</u>
File No.	<u>131-88 R</u>

Description of monument and accessories I established to perpetuate the original location of this corner:

At a point 6 feet West of the found mound of stone, I set a 2½" x 30" aluminum pipe with aluminum cap marked as shown, 14 inches in the ground, from which:

New BOs:

A 4x5x3 ft. rock outcrop with exposed 26x24 inch South face bears N58°E, 26.20 feet marked + BO at top center of face.
A 18x24 inch exposed South rock face bears S55°E, 15.18 feet marked + BO at top center

Raised a mound of stone around monument, 4 ft. base to top of cap.


Painted a 6 inch red band around all BOs and attached 54-3 and 54-9 signs.

Set a steel fencepost approximately 5 feet North with 54-9 sign attached.

Buried the original corner stone Southeast and alongside of monument.

I hereby certify that the above corner point was perpetuated as hereon described on June 15, 1988.

Witnesses: Jeff Petersen and Rick Robinson

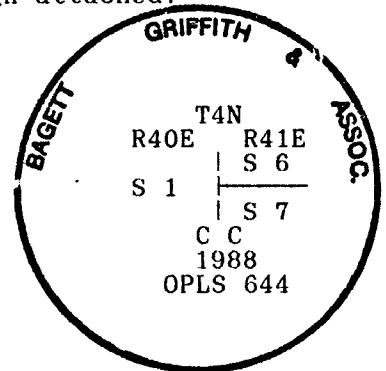

REGISTERED PROFESSIONAL LAND SURVEYOR

OREGON
JULY 10, 1964
DUANE I. GRIFFITH
644

I used a steel tape and magnetic compass in the establishment of new accessories. I used 20° East magnetic declination and the distances are to the "+" chiseled on the bearing object.

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....
..... by
(COUNTY OFFICIAL) (DEPUTY)

E-1