


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Index File No. A-21

History of original corner establishment:

In 1882, under GLO Contract No. 451, Rufus S. Moore set a stone 20x10x8, from which a 4" Pine bears S51°E, 75 lks. and an 8" Pine bears S14°W, 135 lks.

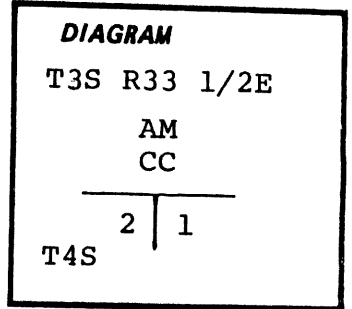

Description of corner evidence found:

Found original closing corner stone 1.1 ft. south of aluminum capped aluminum pipe.


Found an 8" L. Pine, dead and down, bearing S48°E, 45.2 ft. from original stone with blaze face down.

Description of monument and accessories established to perpetuate the original location of this corner:

Set 2 1/2" x 30" aluminum capped aluminum pipe rising 8", stamped:

New BT's:

- An 11" D. Fir bears S26°W, 49.5 ft., scribed T4S R33 1/2E S2 CC AM BT.
- A 4" W. Larch bears S26°E, 118.3 ft., scribed "X" BT.

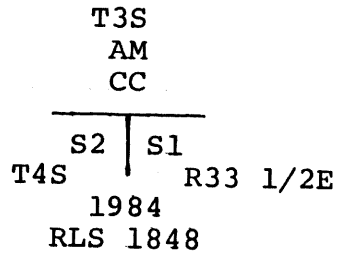

Painted blazes and attached signs as per Standard Specifications for Cadastral Surveys, USFS Region 6, March 1982. Set metal post 4 ft. north of corner.

Compass Declination: 19 1/2°E

Witness: G. Arrand

From 2110-670, north on 2110-710 .6 mi. to the posted line. East 200 ft. along posted line to corner.

I hereby certify the above described corner monument and/or accessories was established as described on May 16, 1984.



Office of..... County of.....
 State of....., I hereby certify that the within instrument was filed in this office
 for record on the..... day of....., 19.....
 by
 (COUNTY OFFICIAL) (DEPUTY)

UNION COUNTY SURVEYOR	
Received	7-2-84
☆ GPO-798-276	
Date Filed	7-3-84
By	G. LANGLITZ, DEPUTY
File No.	917-84 R