


LAND CORNER RECORD

1. T 4 S R 33 1/2 E No. N21 Cor. Sec. Mer Will State Oregon (Rectangular) N. F. Wallowa Whitman Dist. La Grande

2. Corner Status

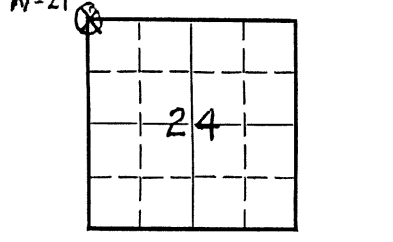

3. Original Description \_\_\_\_\_ Vol. \_\_\_\_\_ Page \_\_\_\_\_ Where Recorded \_\_\_\_\_

4. Description of Corners: None found.

7. Photo Identification  
Photo No. \_\_\_\_\_  
Ident. By: \_\_\_\_\_

8. Plane Coordinate Position Data  
State \_\_\_\_\_ Zone \_\_\_\_\_  
X \_\_\_\_\_  
Y \_\_\_\_\_  
Estab. By \_\_\_\_\_  
Field Book No. \_\_\_\_\_  
Where Filed \_\_\_\_\_

5. Investigation Notes: 1 BT was found. It is a 12" live lodgepole Pine. The scribing is still easily read. I painted the BT. red. There is a metal location poster present.

9. Evaluation  
Authentic \_\_\_\_\_  
Needs Verif. \_\_\_\_\_ Monument \_\_\_\_\_  
Re-estab. \_\_\_\_\_ Survey \_\_\_\_\_  
Land Status \_\_\_\_\_

6. Signed S. Kelly Title Forester Date 11-9-65

**UNION COUNTY SURVEYOR**

---

Date Received \_\_\_\_\_

Date Filed 12-21-87

By G. LANGLITZ, Deputy

File No. 285-87R

N-21

147 T4S 33 1/2 N21

Remonumentation of Certain Original Corner Points,  
T. 4 S., R. 33 1/2 E., Willamette Meridian, Oregon

CHAINS

(Remonumenting corners established by Rufus S. Moore,  
U. S. Deputy Surveyor, in 1882)

The cor. of secs. 13, 14, 23, and 24, determined at  
record bearing and distance from the remains of the  
original bearing trees:

A pine snag, 15 ins. diam., bears N. 36° E., 12  
lks. dist., with scribe marks T4S R33 1/2 E S13  
visible on open blaze.

At the corner point

Set an iron post, 28 ins. long, 2 1/2 ins. diam., 22 ins.  
in the ground, in a mound of stone, 2 ft. base, to top,  
with brass cap mkd.

T 4 S R 33 1/2 E  
S 14 | S 13  
S 23 | S 24  
1977

from which new bearing trees

A lodgepole pine, 10 ins. diam., bears N. 77° E.,  
110 lks. dist., mkd. T4S R33 1/2 E S13 BT.

A lodgepole pine, 8 ins. diam., bears S. 48° E.,  
148 lks. dist., mkd. T4S R33 1/2 E S24 BT.

A lodgepole pine, 9 ins. diam., bears S. 83° W.,  
77 lks. dist., mkd. T4S R33 1/2 E S23 BT.

A fir, 9 ins. diam., bears N. 29° W., 160 lks.  
dist., mkd. T4S R33 1/2 E S14 BT.

Set a 5 ft. steel fence post alongside iron post.

Corner is located 15 lks. east of gravelled road, 15 lks.  
wide, bears N. and S.

The 1/4 sec. cor. of secs. 14 and 23, monumented with the  
original unmarked basalt stone, 16 x 12 x 6 ins., loosely  
set in a mound of stone, 2 ft. base, 6 ins. high, from  
which the only remaining original bearing tree:

A ponderosa pine, 22 ins. diam., bears S. 56° E.,  
152 lks. dist., with fragmentary scribe marks  
visible on open blaze.

At the corner point

Set an iron post, 28 ins. long, 2 1/2 ins. diam., 10 ins.  
in the ground, to solid rock, and in a mound of stone,  
3 ft. base, to top, with brass cap mkd.

T 4 S R 33 1/2 E  
1/4 S 14  
S 23  
1977

from which a new bearing tree

A ponderosa pine, 13 ins. diam., bears N. 48° W.,  
121 lks. dist., mkd. 1/4 S14 BT.

T4S 33 1/2 N 21

~~T4S 33 1/2 N 21~~

UNION COUNTY  
SURVEYOR

Date Received

3/15/13

Date Filed

3/15/13

By

J. L. DEWITT

File No.

386-2013R