


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Index File No. N-25

In 1881, under GLO Contract No. 410, George S. Pershin set a stone 17x12x5, from which a 7" Pine bears N67°E, 116 lks.; a 12" Pine bears S84°E, 142 lks.; A 10" Pine bears S76°W, 75 lks.; and a 10" Pine bears N67°W, 59 lks.

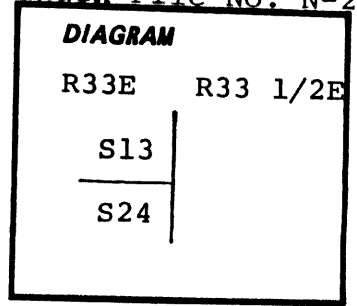

Description of corner evidence found:

Found original stone 17x12x5.

Found a 12.5" L. Pine, dead and down, bearing S76°W, 49.5 ft. scribing visible "T4S R33E S24 BT". Its root hole is still there with a 4" L. Pine growing in it.

Note: Original notes called: set corner at 80 chains. And when he west north on east boundary of S13, he tied to creek at 0.1 chains. Apparently the creek has changed courses in 100 years.

Description of monument and accessories | established to perpetuate the original location of this corner:

Set 2 1/2"x30" aluminum capped aluminum pipe rising 6", stamped:

New BT's:

An 8.5" L. Pine bears N31°W, 136.2 ft., scribed T4S R33E S13 BT.

A 6" W. Larch bears S32°W, 125.9 ft., scribed T4S R33E S24 BT.

Painted blazes and attached signs as per Standard Specifications for Cadastral Surveys, USFS Region 6, March 1982.


Set a metal fence post 3 ft. north of corner.

Compass Declination: 19 1/2°E

Witness: G. Arrand

1/4 mi. east of 2110-580 on 2110. Corner is 200 ft. south and 15 ft. north of the creek.

I hereby certify the above described corner monument and/or accessories was established as described, on May 22, 1984.



**REGISTERED
PROFESSIONAL
LAND SURVEYOR**

B. Sutton
OREGON
JULY 13, 1979
B. A. SUTTON
1848

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office
for record on the..... day of....., 19.....

..... by
(COUNTY OFFICIAL) (DEPUTY)

UNION COUNTY SURVEYOR	
Date Received	7-2-84
Date Filed	7-3-84
By	G. LANGLITZ, DEPUTY
File No.	916-84 R