


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Index File No. A-05

History of original corner establishment:

In 1882, under GLO Contract No. 451, Rufus S. Moore set a stone 16x14x8, from which a 10" Pine bears S16°W, 251 lks. and an 18" Pine bears S58°E, 160 lks.

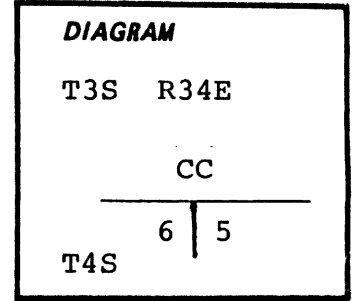

Description of corner evidence found:


Found original stone with notches 1.1 ft. north of closing corner monument.

Bearing Trees Found:

- A 22.5" P. Pine bears S58°E, 104.6 ft., blaze healed, badly leaning.
- A 19" P. Pine bears S16°W, 165.7' scribings visible "T4S R34E S6"

Description of monument and accessories established to perpetuate the original location of this corner:

Set 2 1/2" x 30" aluminum capped aluminum pipe rising 22" in mound of stones, stamped:

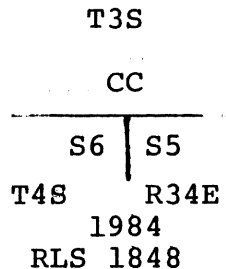

New BT's:

- A 6.5" P. Pine bears S59°E, 63.9 ft., scribed T4S R34E S5 CC.BT.
- An 8" P. Pine bears S31 1/2°W, 92.6 ft., scribed T4S R34E S6 CC.BT.

Painted blazes and attached signs as per Standard Specifications for Cadastral Surveys, USFS Region 6, March, 1982. Set metal fence post 2 ft. north of corner.

Compass Declination: 19 1/2°E

Witness: G. Arrand

From 2105-101, northerly along 2105-104 .9 mi. Corner is 200 ft. east.

I hereby certify the above described corner monument and/or accessories was established as described on May 15, 1984.



Office of..... County of.....

State of..... I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....

..... by
(COUNTY OFFICIAL) (DEPUTY)

UNION COUNTY SURVEYOR	
Date Received	<u>7-2-84</u>
☆ GPO—798-278	
Date Filed	<u>7-3-84</u>
By	<u>G. LANGLITZ, DEPUTY</u>
File No.	<u>923-84R</u>