


RECORD OF LAND CORNER MONUMENTATION

EAST 1/16 CORNER ON THE NORTH LINE OF SECTION 2, T. 4 S., R. 34 E., W.M.

ORIGINALLY ESTABLISHED BY: Corner not previously established

SURVEY NUMBER: N/A

FILED DATE: N/A

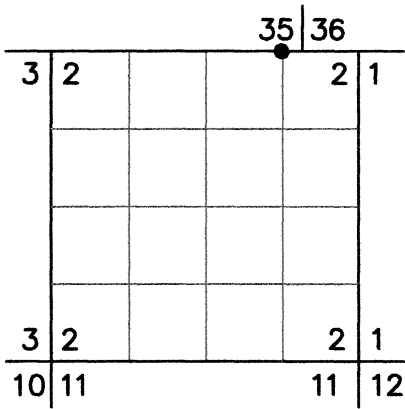

ORIGINAL DESCRIPTION: N/A

EVIDENCE FOUND: N/A

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:


At the corner point as determined by survey, I set a standard USFS 2½"x30" aluminum pipe with attached ¾" aluminum cap, 22" in the ground. Raised a 2½ ft. diameter mound of stone around monument to cap. Cap is marked as shown below.

CORNER MONUMENT
MARKED:

From which, I SET NEW REFERENCE POINTS:

- ▶ A 5/8"x24" iron pin, bears N. 47° E., 34.84 ft., with attached 2" aluminum cap marked RP 1 2025 PLS 69454. Set in an elk fence running N-S
- ▶ A 5/8"x24" iron pin, bears S. 41° E., 30.87 ft., with attached 2" aluminum cap marked RP 2 2025 PLS 69454. Set in an elk fence running N-S

The above reference points also reference the Southwest Corner Section 36, T.3S., R.34E., W.M.



Placed a plastic-encased magnet at the base of the monument. Used RTK GPS to measure accessories. Bearings are geodetic, based on GPS observation at the corner. I set an aluminum post South, 2.0 ft. with 54-9 and 54-2 USFS signs attached and another one East, 26 ft. from the monument with 54-2 USFS sign attached.

RESTORATION BY, STAMP AND DATE:

Work performed September 23, 2025
Survey completed September 25, 2025

T. Jesus Quinones, LSIT

USDA FOREST SERVICE
NORTHEAST OREGON LAND ZONE
1550 Dewey Avenue, Suite A
Baker City, OR 97814
(541) 523-1283

UNION COUNTY SURVEYOR	
Date Received	12/18/25
Date Filed	12/18/25
By	[Signature]
File No.	055-2025R

REGISTERED PROFESSIONAL LAND SURVEYOR
[Signature]
OREGON NOVEMBER 30, 2007 JASON L. HATFIELD #69454
EXPIRES: 6/30/2027