

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


History of original corner establishment:

Original corner was established in 1882 by Rufus Moore.

Set a basalt stone 13 x 8.7ins in ground for 1/4 Sec. Corner marked 1/4 on west face. From which:

A 40" Pine bears S77 E, 157 links (103.6')

A 18" Pine bears N55 W, 270 links (178.2')

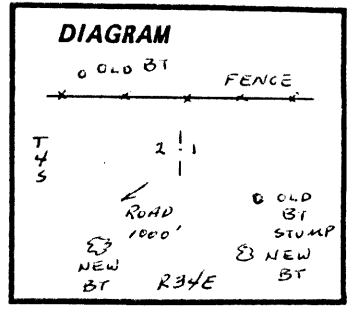

Description of corner evidence found:

Mound of stones. No evidence of marking on stones.


From which:

A dead and down Ponderosa Pine bears N55 W, 178.2' with visible scribe.

A burned out stump bears S77 E, 103.6'. No scribing visible.

Description of monument and accessories established to perpetuate the original location of this corner:

Set a 2" x 30 galvanized iron pipe with 2 1/2" brass cap marked: Pipe is set 24" into ground in a mound of stones. A steel fence post is set 5' from the brass cap with USFS Land Survey Monument sign attached.



New Bearing Trees:

An 11" Ponderosa Pine bears S56 15'W, 222.5' scribed 1/4 S2 BT in a single blaze. A 12" Ponderosa Pine bears S42 15'E, 149.6' scribed 1/4 S1 BT in a single blaze. A 3/4" aluminum washer stamped RLS852 is nailed between the letters B and T on each tree. A 6" red band is painted around each tree and USFS Bearing Tree and Land Survey Monument signs attached.

I hereby certify the above corner point was perpetuated as hereon described on July 16, 1986.

SEE SURVEY
35-86

UNION COUNTY SURVEYOR

Date Received 10-2-86

Date Filed 10-13-86

By G. LANGLITZ, DEPUTY

File No. 167-86 R

REGISTERED PROFESSIONAL LAND SURVEYOR

David L. Haddock

OREGON
JULY 12, 1988
DAVID L. HADDOCK
852

Office of..... County of.....

State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....

..... by

(COUNTY OFFICIAL) (DEPUTY)