

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


History of original corner establishment:

Original Corner was established in 1882 by Rufus Moore.

Set a post 3' long, 3" square, 24" in ground for  $\frac{1}{4}$  sec. corner marked  $\frac{1}{4}$ S on west face. From which:

A 26" Pine bears N 5°W, 17 links (11.2')

A 34" Pine bears S 5°W, 26 links (17.2')

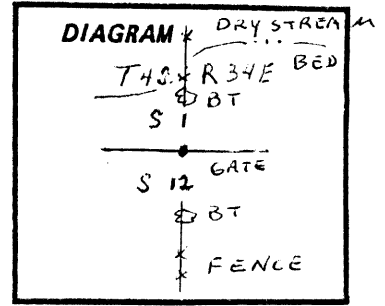

Description of corner evidence found:

A 32" Ponderosa Pine bears N 5°W, 11.2'. Opened healed over blaze to verify scribing.

A 22" Ponderosa Pine bears S 5°W, 17.2' with healed over blaze.


Description of monument and accessories I established to perpetuate the original location of this corner:

Set a 2"x 30" galvanized iron pipe with a 2½" brass cap marked:

Pipe is set in ground 26" with a collar of stones.

Newly opened scribe on section 1 B.T. is painted red.

A steel fence post is set 5' from the brass cap with a U.S.F.S. Land Survey Monument sign attached.



I hereby certify the above corner point was perpetuated as hereon described on July 18, 1986.

SEE SURVEY  
35-86

**UNION COUNTY  
SURVEYOR**

---

Date Received 10-2-86

Date Filed 10-13-86

By G. LANGRISH, DEPUTY

File No. 158-86 R

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

David L. Haddock  
OREGON  
JULY 12, 1988  
DAVID L. HADDOCK  
852

Office of..... County of.....  
State of....., I hereby certify that the within instrument was filed in this office  
for record on the..... day of....., 19.....  
..... by .....

(COUNTY OFFICIAL)

(DEPUTY)