


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

None

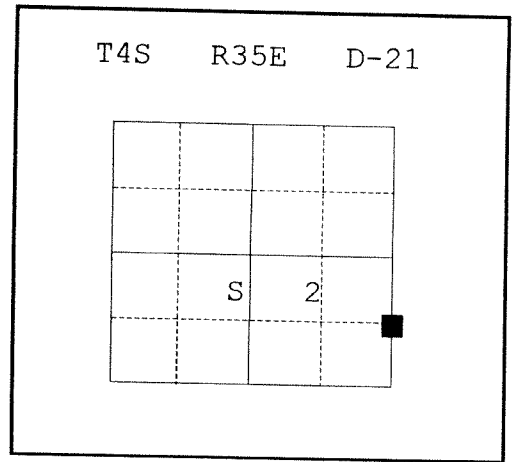

No record of subsequent monumentation found in Union County survey records

DESCRIPTION OF CORNER EVIDENCE FOUND:

See survey 037-1988

Note: This remon record is being filed in 2005 for the purpose of adding to the information file. The record was not required in 1988, but I believe this will c record. The record was transcribed from the survey field notes.

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED

TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

I set a 2½" x 30" aluminum pipe with aluminum cap marked as shown, 28 inches in with a mound of stone 3 feet at the base around the pipe, from which;

NEW BEARING TREES:

An 18" Ponderosa Pine bears S 42°W, 25.93 feet, marked S 1/16 S2 BT.  
a 29" Ponderosa Pine bears S 25°E, 72.55 feet, marked S 1/16 S 1 BT.


I hereby certify that the above corner point was perpetuated as hereon descdribed on September 1988

Witness: Jeff Peterson

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

OREGON  
JULY 12, 1973  
GREGORY T. BLACKMAN  
991

Renewal Date: December 31, 2005

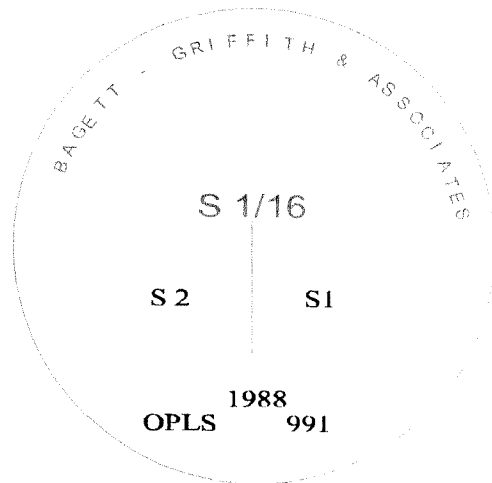

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 18° East declination, the distances are to a 50d spike driven in the right side of the root crown. I attached a brass washer marked OPLS 991 to the bearing tree blaze.

**UNION COUNTY  
SURVEYOR**

Date Received 12/15/05

Date Filed 12/15/05

Filed By G. T. Blackman

File Number 052-2005R

D-21