


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

E-5

History of original corner establishment: Corner established by Rufus S. Moore under General Land office contract no. 451, dated June 12, 1882. Surveyor General Records states: Set basalt stone 24"x15"x12", 18 inches in the ground for corner to sections 5, 6, 7, & 8, marked with 5 notches on S and E edges, from which

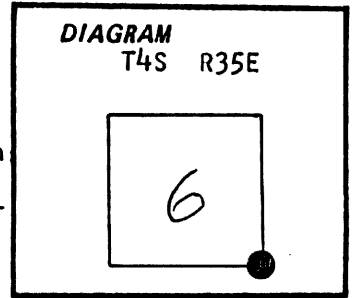

- A Pine 20" in diameter bears N78°E, 40 lks dist marked T4S S5 BT
- A Pine 44" in diameter bears N40°W, 30 lks. dist. marked R35E S6 BT.
- A Pine 24" in diameter bears S42°W, 75 lks. dist. marked S7 BT
- A Pine 12" in diameter bears S11°E, 22 lks. dist. marked S8 BT

Corner found by survey number 43-76, work done by Duane I. Griffith, OPLS 644, plat states: Found GLO corner, set 3/8"x10" spike at GLO Corner.

No record of subsequent remonumentation was found in County Records. Description of corner evidence found:

Found stone of called size with notches visible in mound of stone. Found Spike as per survey number 43-76

- Found NE BT stump, scribes visible, N78°E, 40 lks.
- Found SE BT, a 16" Ponderosa Pine dead and standing, scribes visible, S11°E, 22 lks.
- Found SW BT, a 38" Ponderosa Pine alive and standing vigerous, scribes visible S42°W, 75 lks.
- Found NW BT stump, no scribes visible, N40°W 30 lks.


See map of survey dated November 1985.

Description of monument and accessories established to perpetuate the original location of this corner: In place of spike, I set a 2 1/2"x30" aluminum pipe with aluminum cap marked as shown, 26" in the ground with surrounding mound of stone from which:

- An 8" Tamarack bears N89°E, 23.00 feet, marked T4S R35E S5 BT.
- A 10" Tamarack bears S43°E, 30.19 feet, marked T4S R35E S8 BT.
- An 8" Tamarack bears N7°W, 47.98 feet, marked T4S R35E S6 BT.

Buried stone West. Set steel fence post approximately 5 feet North with 54-4 sign attached.

Corner set 10/22/85
Witness: Greg Blackman, Rick Robinson

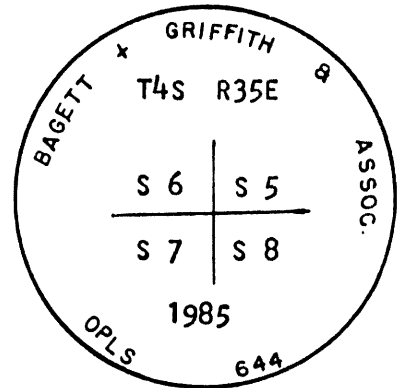

REGISTERED PROFESSIONAL LAND SURVEYOR

OREGON JULY 10, 1964 DUANE I. GRIFFITH 644

Brass washer nailed to BT blaze. Used steel tape and magnetic compass with 20° East declination. Measured to 50d spike set in right side of tree when facing tree, unless otherwise stated.

Office of..... County of..... State of..... I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....

(COUNTY OFFICIAL) UNION COUNTY SURVEYOR (DEPUTY)

orm R6-7100-57 (9/71)

Date Received 12-5-85
Date Filed 12-6-85
By G. LANGLITZ, DEPUTY
File No. 114-85 R

☆ U.S. GOVERNMENT PRINTING OFFICE - 1983-793-276

E-5 BK IV PG 4