

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


E-23

History of original corner establishment: Corner established by Rufus S. Moore under General Land office contract no. 451, dated June 12, 1882. Surveyor General Records states:

Set a post 3 feet long 3 inches square 24 inches in the ground for 1/4 section corner marked 1/4 on North face From which:

A Pine 14 inches in diameter bears N34°E, 82 lks distant, marked 1/4 S BT

A Pine 15 inches in diameter bears S15°E, 34 lks distant, marked 1/4 S BT.

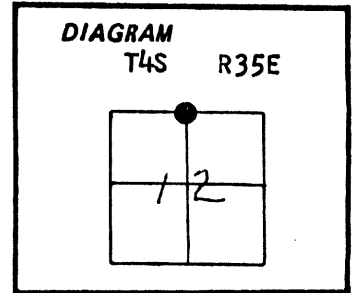

No record of subsequent remonumentation was found in County Records. Description of corner evidence found:

NONE

See map of survey dated November 1985.

Description of monument and accessories I established to perpetuate the original location of this corner: At proportionate distance, I set a 2 1/2'x30" Aluminum pipe with aluminum cap marked as shown, 28" in the ground, From which:

An 8" Ponderosa Pine bears N44°E, 39.71 feet marked 1/4 S 1 BT.

An 11" Ponderosa Pine bears S69°W, 20.98 feet, marked 1/4 S 12 BT.


Set a steel fence post approximately 5 feet west with 54-4 sign attached.

Corner set 10/18/85

Witness: Greg Blackman, Rick Robinson, Stratton French.

REGISTERED PROFESSIONAL LAND SURVEYOR

OREGON JULY 10, 1964 DUANE I. GRIFFITH 644

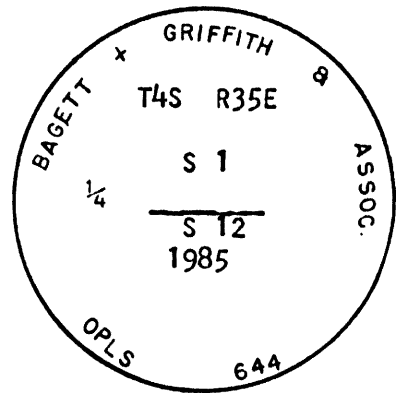

Brass washer nailed to BT blaze. Used steel tape and magnetic compass with 20° East declination. Measured to 50d spike set in right side of tree when facing tree, unless otherwise stated.

Office of..... County of..... State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....

..... by (COUNTY OFFICIAL) UNION COUNTY SURVEYOR (DEPUTY)

Form R6-7100-57 (9/71)

Stamp with fields: Date Received 12-5-85, Date Filed 12-6-85, By G. LANGLITZ, DEPUTY, File No. 116-85 R