

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Index: G-13

Quarter Corner Sections 9 and 10, T.4S., R.35E., W.M.

Original corner was set by Rufus Moore under Contract No. 451 dated June 12, 1882.

His record reads:

40.00 Set a basalt stone 20x15x10 15 ins. in ground for 1/4 sec. cor. marked 1/4 on W. face and raised a mound of stone alongside. Fits impracticable.

1	DIAGRAM	1
1	T4S R35E	1
1	1/4	1
1	S9:S10	1
1	1993	1
1	PLS 852	1
1		1
1		1
1		1

Description of corner evidence found:

Found 20x15x10 inch stone with chiseled 1/4 on face. Stone was imbedded in ground at bottom of rockjack along intersecting south fenceline and east-west fencelines.

Description of monument and accessories I established to perpetuate the original location of this corner:

In the position of the found stone corner, I set a 2 1/2" x 30" aluminum pipe with aluminum cap. I buried the stone along side of the pipe. I stamped the cap as shown in the diagram above. I set the following 2" diameter aluminum caps on 1/2 inch by 24 inch rebar for reference monuments:

- S86 1/4°W, 18.7 feet near a rockjack at opposite end of gate.
- S7 1/4°W, 9.3' near large rock under south fenceline.
- N84°E, 29.2' under east fenceline.
- N 0 1/4°W, 18.7' near underground powerline vault.

This work was done July 7, 1993.

**REGISTERED
PROFESSIONAL
LAND SURVEYOR**

David L Haddock

**OREGON
JULY 12, 1988
DAVID L. HADDOCK
852**

Office of _____ County of _____
State of _____, I hereby certify that the within instrument was filed
in this office for record on the _____ day of _____, 19____.

(COUNTY OFFICIAL)

(DEPUTY)

UNION COUNTY SURVEYOR	
Date Received	<u>9/1/93</u>
Date Filed	<u>9/10/93</u>
By	<u><i>Hyman T. Blum</i></u>
File No.	<u>040-1993R</u>

HORIZONTAL CONTROL DATA

UNION COUNTY, OREGON

OREGON STATE PLANE, NORTH ZONE (3601)

STA NAME: 2026048

1/4 SECTION CORNER COMMON TO SECTIONS 9 AND 10

TWP. 4 S RGE. 35 E.

GEODETIC COORD: NAD 83(91)

DATE TIED: DECEMBER 3, 2020

LAT: 45 ° 13 ' 58.48613 " N

SURVEYOR: RICK G ROBINSON
OPLS 2219

LONG: 118 ° 25 ' 28.35469 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN
2006 ADAMS AVENUE
LAGRANDE, OR 97850
(541) 963-6092

SP. COOR: NAD 83(91)

N: 577875.767 INT FT.

E: 8736692.471 INT FT.

TYPE: GPS

THETA: 1 ° 28 ' 18.7863749 "

ORDER: SECOND CLASS: 1


SCALE FACTOR: 0.9998952082

ELEV: 3649.52 US FT.

ELEV: DATUM: NGVD 29

COMMENTS:

2 1/2" aluminum pipe with 2 1/2" aluminum cap
marked as shown, set in mound of stone

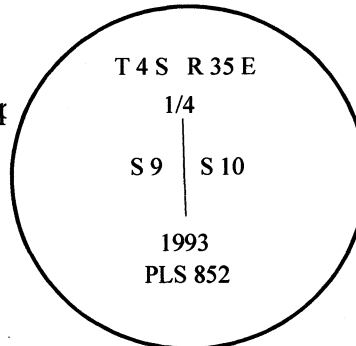

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Rick G. Robinson

OREGON
July 17, 1986
RICK G. ROBINSON
2219

Renewal Date: December 31, 2020

1 METER = 3.280833333... US FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM

TO CALCULATE ELEVATION FACTOR (IN THE NORTH AMERICAN CONTINENT)

DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)