


History of original corner establishment: Corner established by Rufus S. Moore under General Land office contract no. 451, dated June 12, 1882. Surveyor General Records states: Set a basalt stone 14"x10"x6", 10 inches in the ground for 1/4 section corner, marked 1/4 on west face and raised a mound of stone alongside, pits impracticable.

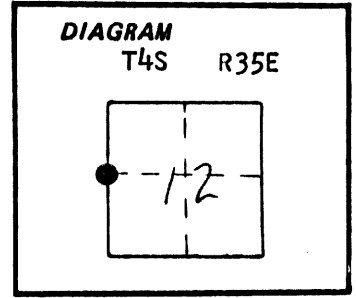

No record of subsequent remonumentation was found in County Records.
Description of corner evidence found:

NONE

See map of survey dated November 1985.

Description of monument and accessories I established to perpetuate the original location of this corner: At proportionate distance I set a 2 1/2"x30" aluminum pipe with aluminum cap marked as shown, 27 inches in the ground with surrounding mound of stone, from which:


A 5/8"x30" iron pin with plastic cap marked BGA Survey Marker bears N60°E 7.59 feet.

A 5/8"x30" iron pin with plastic cap marked BGA Survey Marker bears N60W 7.62 feet.

Set a steel fence post approximately 5 feet North with 54-4 sign attached.

Corner set 10/21/85

Witness: Greg Blackman, Rick Robinson

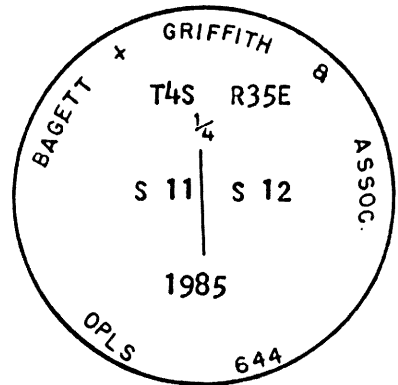

REGISTERED PROFESSIONAL LAND SURVEYOR

Duane I. Griffith

OREGON JULY 10 1964
DUANE I. GRIFFITH
644

Brass washer nailed to RT blaze. Used steel tape and magnetic compass with 20° East declination. Measured to 50d spike set in right side of tree when facing tree, unless otherwise stated.

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....

(COUNTY OFFICIAL) **UNION COUNTY SURVEYOR** by (DEPUTY)

Form R6-7100-57 (9/71)

☆ U.S. GOVERNMENT PRINTING OFFICE - 1983-793-276

Date Received 12-5-85
Date Filed 12-6-85
By G. LANGLITZ, DEPUTY
File No. 120-85 R