


History of original corner establishment:  
Corner not previously established.

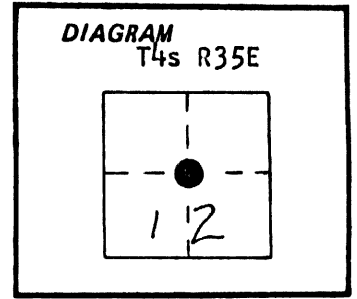

Description of corner evidence found:

None

UNION COUNTY SURVEYOR  
Date Received 12-5-85  
Date Filed 12-6-85  
By G. LANGLITZ, DEPUTY  
File No. 121-85 R

See map of survey dated November 1985.

Description of monument and accessories I established to perpetuate the original location of this corner: At position determined by survey, I set a 2 1/2"x30" aluminum pipe with aluminum cap marked as shown, 28 inches in the ground, from which:

A 24" Ponderosa Pine bears S18°E, 54.17 feet marked X BT


A 19" Ponderosa Pine bears S48W, 76.67 feet marked C 1/4 S12 BT

Set a steel fence post approximately 5 feet East with a 54-9 and 54-2 sign attached.

Set a steel fence post approximately 5 feet South with a 54-2 sign attached.

Corner set 10/21/85

Witness. Greg Blackman, Rick Robinson

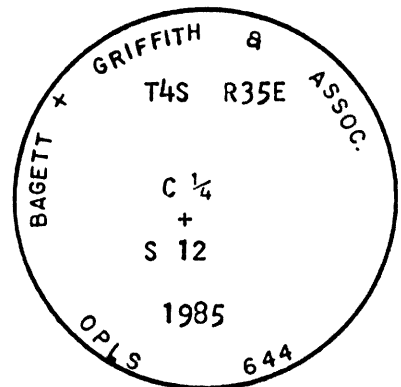

REGISTERED PROFESSIONAL LAND SURVEYOR

OREGON JULY 10, 1984 DUANE I. GRIFFITH 644

Brass washer nailed to BT blaze. Used steel tape and magnetic compass with 20° East declination. Measured to 50d spike set in right side of tree when facing tree, unless otherwise stated.

Office of..... County of.....

State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....

..... by ..... (COUNTY OFFICIAL) (DEPUTY)