



CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:  
Original corner set in 1882 by Rufus Moore.

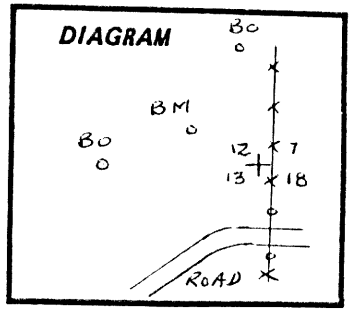



Description of corner evidence found:  
A brass cap set in 1976 by PLS 644 marked as shown below:



Note: U.S. Coast and Geodetic Survey Bench Mark S508 dated 1951 bears N36°00'W, 18.89' from the corner.

Description of monument and accessories I established to perpetuate the original location of this corner:

Set two 1/2" x 24" steel reinforcing bars 20" into ground and attached 2" aluminum caps marked as shown below:



I hereby certify the above corner point was perpetuated as hereon described on September 10, 1986.

**UNION COUNTY SURVEYOR**  
Date Received 10-2-86  
Date Filed 10-13-86  
By G. LANGLITZ, DORM  
File No. 151-86 R

**REGISTERED PROFESSIONAL LAND SURVEYOR**

*David L. Haddock*

**OREGON**  
JULY 12, 1968  
**DAVID L. HADDOCK**  
852

SEE SURVEY 35-86

Office of..... County of.....  
State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....

..... by .....  
(COUNTY OFFICIAL) (DEPUTY)

**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**


History of original corner establishment:

Corner was established by Jacob C. Cooper, US Deputy Surveyor, during the original survey Contract No. 397 dated July, 1881.

Set a stone 8x10x16, 8 ins in ground marked T4S S7 on NE, R35E S18 on SE, R34E S13 on SW, and S12 on the NW faces with 4 notches on the S and 2 notches on N edges.

and raised a mound of stone at cor. 3 ft wide at base, 18 ins high

**DIAGRAM**



Corner was maintained by David L. Haddock, PLS 852, during a retracement survey dated September, 1986.

A brass cap set in 1976 by PLS 644 marked as shown.

Note: US Coast and Geodetic Survey Bench Mark S508 dated 1951 bears N36° 00'W, 18.89' from the corner.

Set two ¼" x 24" steel reinforcing bars 20" into ground and attached 2" aluminum caps marked as shown below:

BO, Cor S0°00'W, 34.89', 1986, PLS 852 and BO, Cor N90°00'E, 34.93', 1986, PLS 852.

Description of corner evidence found:

Found the corner monument, the northerly BO rebar and the USC&G bench mark had been dozed out of the ground. It appears to have occurred when the line was cleared for the elk enclosure fence on the Starkey Experiment Station.

No bearing trees were previously established.

No. 4 Rebar marked BO, Cor N90°00'E, 34.93, 1986, PLS 852 bears N89° 45'W, 34.93 feet after resetting the monument.

Description of monument and accessories I established to perpetuate the original location of this corner:

Reset the 1"x30" galvanized pipe with a 2¼" brass cap, marked as shown in the diagram, 18" in the ground to bed rock, using the remaining BO rebar and distances from other corners to find the original monument hole. Rebuilt the existing mound with rock & earth to be 36" in diameter by 8" high around the monument.

No new bearing trees set because no trees are available.

No. 5 Rebar with a yellow plastic cap marked PLS 699 bears N1° 45'W, 22.3 feet.

Bearings were turned from the control traverse with a theodolite, basis of bearing being the bearing between the SE and S¼ corners of Section 7 as shown on MOS 43-76.

Set steel fence posts 5 feet N and 5 feet S of the corner on the National Forest boundary lines. Attached Forest Boundary signs to each post and a Land Survey Monument sign to the N post.

<b>UNION COUNTY SURVEYOR</b>	
Date Received	<u>9-25-89</u>
Date Filed	<u>9-25-89</u>
By	<u>G. LANGLITZ</u>
File No.	<u>181-89 R</u>

I, Leland L. Myers, P.O. Box 98, Sumpter, OR 97877, do hereby certify that on July 18, 1989, I re-monumented the corner as herein described.

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Leland L. Myers*  
OREGON  
JULY 9, 1965  
LELAND LEE MYERS  
699

FILED

IN THE OFFICE OF THE UNION COUNTY SURVEYOR  
THIS \_\_\_\_\_ DAY OF \_\_\_\_\_, 19\_\_\_\_

\_\_\_\_\_  
Union County Surveyor