


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

J-17

History of original corner establishment: Corner established by Rufus S. Moore under General Land office contract no. 451, dated June 12, 1882. Surveyor General Records states:

Set basalt stone 14"x10"x8", 10 inches in the ground for corner to sections 10, 11, 14, & 15, marked with 4 notches on S and 2 notches on E edges and raised mound of stone alongside, pits impractable

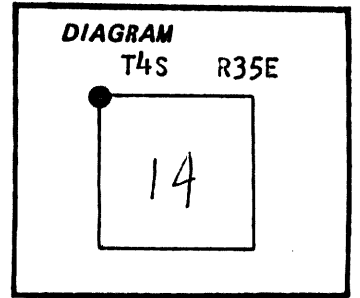

No record of subsequent remonumentation was found in County Records.


Description of corner evidence found:

Found stone 14"x10"x8" in bottom of rock jack marked with 4 and 4 grooves. It appears that the rock Jack was built over this stone. The corner is also relative to other corners, and I therefore accept this position as the corner.

See map of survey dated November 1985.

Description of monument and accessories I established to perpetuate the original location of this corner: In place of stone I set a 2 1/2"x30" aluminum pipe with aluminum cap marked as shown, 14 inches in the ground with surrounding mound of stone 5 feet at the base to top of the cap, from which:

- A 5/8"x30" iron pin with plastic cap marked BGA Survey Marker bears N20E, 11.07 feet
- A 5/8"x30" iron pin with plastic cap marked BGA Survey marker bears S13°E, 22.97 feet
- A 5/8"x30" iron pin with plastic cap marked BGA Survey Marker bears S29°W, 26.19 feet
- A 5/8"x30" iron pin with plastic cap marked BGA Survey Marker Bears N49°W, 19.54 feet.

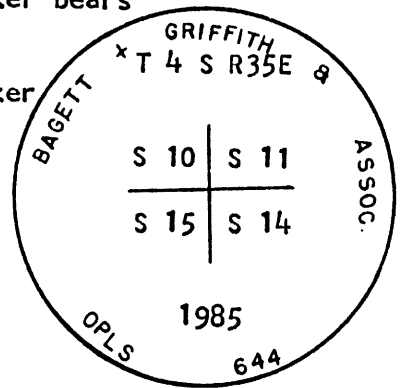

Buried original stone North  
Set steel fence post approximately 5 feet East with 54-4 sign attached.

Corner set 10/11/85  
Witness: Greg Blackman, Rick Robinson, Stratton French

REGISTERED PROFESSIONAL LAND SURVEYOR

DUANE J. GRIFFITH  
OREGON JULY 10, 1964  
644

Brass washer nailed to RT blaze. Used steel tape and magnetic compass with 20° East declination. Measured to 50d spike set in right side of tree when facing tree, unless otherwise stated.

County of.....  
State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....

(COUNTY OFFICIAL) DUANE J. GRIFFITH SURVEYOR (DEPUTY)

Form R6-7100-57 (9/71)

☆ U.S. GOVERNMENT PRINTING OFFICE - 1983-793-276

by  
UNION COUNTY SURVEYOR

Date Received 12-5-85

Date Filed 12-6-85

By G. LANGLITZ, DEPUTY

File No. 126-85 R

J 17

# HORIZONTAL CONTROL DATA

## UNION COUNTY, OREGON

### OREGON STATE PLANE, NORTH ZONE (3601)

STA NAME: 2020054

SECTION CORNER COMMON TO SECTIONS 10, 11, 14, AND 15

TWP. 4 S RGE. 35 E.

GEODETIC COORD: NAD 83(91)

DATE TIED: December 11, 2020

LAT: 45 ° 13 ' 31.60072 " N

SURVEYOR: RICK G. ROBINSON  
OPLS 2219

LONG: 118 ° 24 ' 13.95126 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN  
2006 ADAMS AVENUE  
LAGRANDE, OR 97850  
(541) 963-6092

SP. COOR: NAD 83(91)

N: 575291.361 INT FT.

E: 8742085.448 INT FT.

TYPE: GPS

THETA: 1 ° 29 ' 11.5522528 "

ORDER: SECOND CLASS: 1


SCALE FACTOR: 0.999895071

ELEV: 3665.76 US FT.

ELEV: DATUM: NGVD 29

**COMMENTS:**

2 1/2" aluminum pipe with 2 1/2" aluminum cap  
marked as shown.

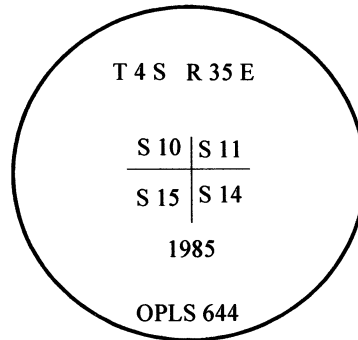

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

OREGON  
July 17, 1986  
RICK G. ROBINSON  
2219

Renewal Date: December 31, 2020

1 METER = 3.280833333... US FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM

TO CALCULATE ELEVATION FACTOR ( IN THE NORTH AMERICAN CONTINENT)

DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)