


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment: Corner established by Rufus S. Moore under General Land office contract no. 451, dated June 12, 1882. Surveyor General Records states: Set a basalt stone 17"x12"x5", 12 inches in the ground for 1/4 section corner marked 1/4 on W face from which:
A Pine 15" in diameter bears S20°W, 118 lks. dist. marked 1/4 S BT.

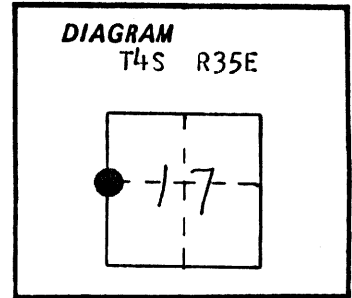

A Pine 15" in diameter bears N68°E, 54 lks. dist. marked 1/4 S BT.

Corner found by survey number 43-76, work done by Duane I. Griffith, OPLS 644. Plat states: Found GLO Corner, set a 3/8"x10" spike at GLO Corner.

No record of subsequent remonumentation was found in County Records.

Description of corner evidence found:

Found marked stone , called size, in mound of stone.

Found spike as per survey number 43-76

Found SW BT dead and down, S10°W, 118 lks.

UNION COUNTY SURVEYOR
Date Received 12-5-85
Date Filed 12-6-85
By G. LAWLITZ
File No. 132-85R

See map of survey dated November 1985.

Description of monument and accessories I established to perpetuate the original location of this corner:

In place of spike, I set a 2 1/2"x30" aluminum pipe with aluminum cap marked as shown, 10 inches in the ground with surrounding mound of stone from which:

An 8" Ponderosa Pine bears S67°E, 33.93 feet, marked 1/4 S17 BT


A 6" Ponderosa Pine bears N45°W 34.32 feet, marked 1/4 S 18 BT

Buried original stone West.

Set a steel fence post approximately 5 feet North with 54-4 sign attached.

Corner set 10/23/85

Witness: Greg Blackman, Rick Robinson

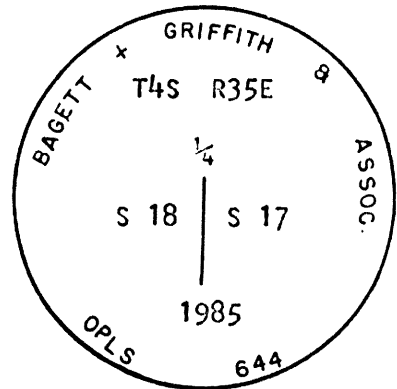

REGISTERED PROFESSIONAL LAND SURVEYOR
Duane I. Griffith
OREGON JULY 10, 1964
DUANE I. GRIFFITH 644

Brass washer nailed to BT blaze. Used steel tape and magnetic compass with 20° East declination. Measured to 50d spike set in right side of tree when facing tree, unless otherwise stated.

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....
..... by
(COUNTY OFFICIAL) (DEPUTY)

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 4 S., R. 35 E., Willamette Meridian, Oregon

FEET	<p>The geographic position (NAD 1983 (CORS 96)) of this corner is: Latitude: 45° 12' 40.937" N. Longitude: 118° 28' 32.363" W.</p> <p>Continue over open, level land.</p> <p>4980.0 Dirt road, 14 ft. wide, bears N. 35° E. and S. 35° W.</p> <p>5081.80 Point selected for the witness cor. for the cor. of secs. 13, 18, 19, and 24, hereinbefore described.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p>
	<p>WC T 4 S R 34 E R 35 E S 13 S 18 S 24 S 19 2005</p>
	<p>From which</p> <p>A fir, 24 ins. diam., bears S. 69 1/4° E., 19.4 ft. dist., mkd. X at breast height and BT at the base.</p> <p>A spruce, 14 ins. diam., bears S. 7 1/2° W., 32.4 ft. dist., mkd. X at breast height and BT at the base.</p> <p>A fir, 5 ins. diam., bears S. 60 1/4° W., 25.3 ft. dist., mkd. X at breast height and BT at the base.</p> <p>Deposit a magnet in a white plastic case at the base of the stainless steel post.</p>
5131.80	<p>True point for the cor. of secs. 13, 18, 19, and 24.</p> <hr/> <p>From the cor. of secs. 17, 18, 19, and 20.</p> <p>N. 0° 7' 45" E., between secs. 17 and 18.</p> <p>Over level land, through scattered timber</p>
2655.42	<p>The 1/4 sec. cor. of secs. 17 and 18, perpetuated in 1976 from original evidence no longer in existence, and in 1985, by Duane I. Griffith, Professional Land Surveyor No. 644, and recorded as Survey No. 43-76 at the Union County Surveyor's Office, in LaGrande, Oregon, subsequently utilized in 1989, by Leland Lee Myers, Professional Land Surveyor No. 699, recorded as Survey No. 21-89 at the Union County Surveyor's Office in LaGrande, Oregon, monumented with an aluminum post,</p>

UNION COUNTY SURVEYOR

Date Received 3/8/13

Date Filed 3/8/13

By J. B. & J. DEARBY

File No. 208-2013R

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 4 S., R. 35 E., Willamette Meridian, Oregon

FEET

2 ins. diam., firmly set, projecting 12 ins. above the ground,
in a mound of stone, 3 ft. base, to top, with an aluminum cap
mkd.

T 4 S R 35 E
1/4
S 18 | S 17
1985
OPLS 644

from which the bearing trees marked by Griffith in 1985

A pine, 10 ins. diam., bears S. 64¼° E., 33.8 ft. dist.,
with scribe marks 1/4 S17 visible on open blaze.

A pine, 11 ins. diam., bears N. 41½° W., 34.2 ft. dist.,
with scribe marks 1/4 S18 visible on open blaze.

Corner is located on moderate W. slope, in scattered timber.

The geographic position (NAD 1983 (CORS 96)) of this corner is:

Latitude: 45° 13' 06.778" N. Longitude: 118° 27' 55.052" W.

N. 0° 18' 21" E., beginning new measurement.

Descend along moderate W. slope, through scattered timber.

1325.86 Point for the N 1/16 sec. cor. of secs. 17 and 18, not
monumented.

2651.70 The cor. of secs. 7, 8, 17, and 18, perpetuated in 1976, and in
1985, by Duane I. Griffith, Professional Land Surveyor No. 644,
and recorded as Survey No. 43-76 at the Union County Surveyor's
Office, in LaGrande, Oregon, subsequently utilized in 1989, by
Leland Lee Myers, Professional Land Surveyor No. 699, recorded
as Survey No. 21-89 at the Union County Surveyor's Office, in
LaGrande, Oregon, monumented with an aluminum post, 2 ins.
diam., firmly set, projecting 12 ins. above the ground, in a
mound of stone, 4 ft. base, to top, with an aluminum cap mkd.

T 4 S R 35 E
S 7 | S 8
S 18 | S 17
1985
OPLS 644

from which the remains of an original bearing tree

A pine stump, 20 ins. diam., bears S. 70° W.,
133.1 ft. dist., with fragmentary scribe marks visible

UNION COUNTY
SURVEYOR

Date Received 3/8/13

Date Filed 3/8/13

By [Signature]

File No. 208-2013R