


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

L-21

History of original corner establishment: Corner established by Rufus S. Moore under General Land office contract no. 451, dated June 12, 1882. Surveyor General Records states:

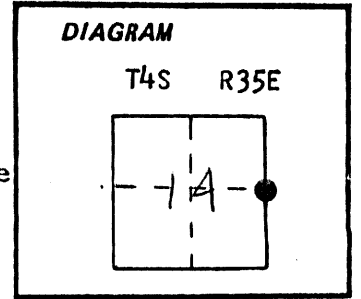

Set a Basalt stone 17"x11"x7", 12 inches in the ground for 1/4 section corner, marked 1/4 on W face and raised a mound of stone alongside, pits impracticable.

No record of subsequent remonumentation was found in County Records. Description of corner evidence found:

Found stone 17"x11"x7" marked and a mound of stone alongside.

UNION COUNTY SURVEYOR
Date Received 12-5-85
Date Filed 12-6-85
By G. LANEUX, DEPUTY
File No. 136-85 R

See map of survey dated November 1985.


Description of monument and accessories I established to perpetuate the original location of this corner:

In place of stone I set a 2 1/2"x30" aluminum pipe with aluminum cap marked as shown, 20" in the ground with surrounding mound of stone from which:

- A 5/8"x30" rebar bears S18°E, 9.46 feet, with plastic cap marked BGA Survey Marker.
A 5/8"x30" rebar bears S81°W, 11.34 feet, with plastic cap marked BGA Survey Marker.

Buried original stone North

Set a steel fence post approximately 5 feet North.
Corner set 10/15/85
Witness: Greg Blackman

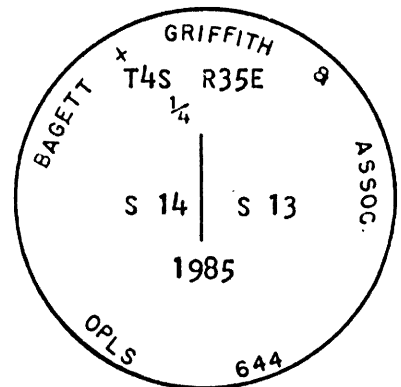

REGISTERED PROFESSIONAL LAND SURVEYOR

OREGON JULY 10, 1964 DUANE I. GRIFFITH 644

Brass washer nailed to BT blaze. Used steel tape and magnetic compass with 20° East declination. Measured to 50d spike set in right side of tree when facing tree, unless otherwise stated.

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....
(COUNTY OFFICIAL) by (DEPUTY)