


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:
Corner not previously established.

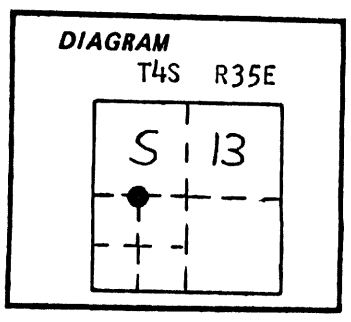

Description of corner evidence found:
None

UNION COUNTY SURVEYOR

Date Received 12-5-85
 Date Filed 12-6-85
 By G. LANGRISH DEPUTY
 File No. 137-85 R

See map of survey dated November 1985.
Description of monument and accessories I established to perpetuate the


original location of this corner: At position determined by survey I set a 2 1/2"x30" aluminum pipe with aluminum cap marked as shown, 28 inches in the ground with surrounding mound of stone, from which:

A 9" Douglas Fir bears S26°W, 19.44 feet, marked CW 1/16 S13 BT.

A 9" Douglas Fir bears N73°W, 21.71 feet, marked X BT.

Set a steel fence post approximately 5 feet East with a 54-9 and 54-2 sign attached.
Set a steel fence post approximately 5 feet South with a 54-2 sign attached.

Corner set 10/15/85
Witness: Greg Blackman, Stratton French

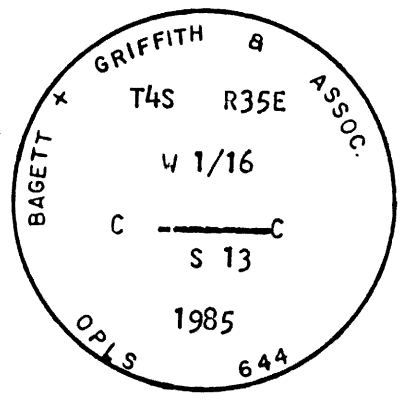

*Brass washer nailed to BT blaze. Used steel tape and magnetic compass with 20° East declination. Measured to 50d spike set in right side of tree when facing tree, unless otherwise stated.

Office of..... County of.....
 State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....
 by.....
 (COUNTY OFFICIAL) (DEPUTY)