


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment: Corner established by Rufus S. Moore under General Land office contract no. 451, dated June 12, 1882. Surveyor General Records states: Set a basalt stone 24"x18"x12", 18 inches in the ground for 1/4 section corner marked 1/4 on North face from which:

A pine 24" in diameter bears N3°E, 38 lks. dist. marked 1/4 S BT.

A Pine 20" in diameter bears S28°E, 24 lks. dist. marked 1/4 S Bt



No record of subsequent remonumentation was found in County Records.

Description of corner evidence found:

NONE

UNION COUNTY SURVEYOR
Date Received 12-5-85
Date Filed 12-6-85
By G. LANGLITZ, DEPUTY
File No. 164-85 R

See map of survey dated November 1985.

Description of monument and accessories I established to perpetuate the original location of this corner: At proportionate distance I set a 2 1/2"x30" aluminum pipe with aluminum cap marked as shown, 27 inches in the ground with surrounding mound of stone, from which:


A 16" Ponderosa Pine bears S72°E, 69.14 feet, marked 1/4 S 29 BT

A 21" Ponderosa Pine bears N5°E, 52.97 feet, marked 1/4 S 20 BT.

Set a steel fence post approximately 5 feet East of corner with 54-4 sign attached.

Corner set 10/19/85

Witness: Greg Blackman, Rick Robinson

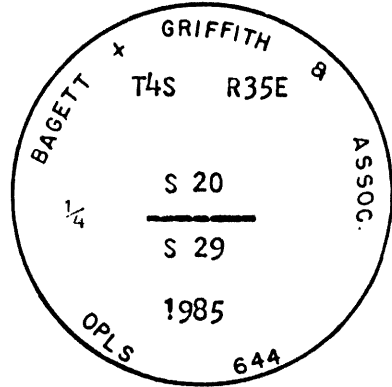

Brass washer nailed to BT blaze. Used steel tape and magnetic compass with 20° East declination. Measured to 50d spike set in right side of tree when facing tree, unless otherwise stated.

Office of..... County of.....

State of..... I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....

..... by
(COUNTY OFFICIAL) (DEPUTY)