


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment: Corner established by Rufus S. Moore under General Land office contract no. 451, dated June 12, 1882. Surveyor General Records states:
Set a basalt stone 18"x12"x6", 12 inches in the ground for corner to sections 22, 23, 26, & 27 marked with 2 notches on South and 2 notches on the East edges, from which:

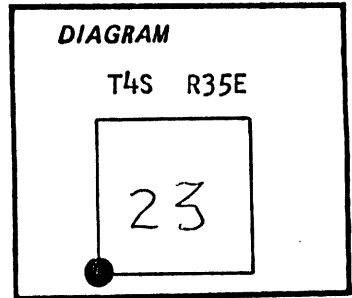

A Spruce 5 inches in diameter bears N68°E, 18 lks. dist. marked T4S R35E S23 BT.

A Spruce 15 inches in diameter bears N74°W, 28 lks. marked T4S R35E S22 BT.

A Fir 36 inches in diameter bears S26°W, 46 lks. , marked T4S R35E S27 BT.

A Fir 9 inches in diameter bears S63°E, 44 lks., marked T4S R35E S 26 BT.

No record of subsequent remonumentation was found in County Records.

Description of corner evidence found:

Found stone 18"x16"x8" marked with 3 and 2 grooves.

Found a 28" Spruce N68°E, 11.9 feet, alive and vigerous, scribes visible.

Found rotted out stump a record bearing and distance for SE BT.

Found remains of stump hole at record bearing and distance for SW BT.

Found 20" stump N74°W, 18.5 feet with scribes visible.

See map of survey dated November 1985.

Description of monument and accessories I established to perpetuate the original location of this corner: In place of stone I set a 2 1/2"x30" aluminum pipe with aluminum cap marked as shown, 30" in the ground with surrounding mound of stone from which:

A 12" Douglas Fir bears S73E, 16.42 feet, marked T4S R35E S 26 BT


A 12" Tamarack bears S20°W, 2.54 feet , Marked T4S R35E S27 BT

A 20" Douglas Fir bears N4°W, 65.45 feet, marked T4S R35E S22 BT

Buried stone West.

Set steel fence post approximately 5 feet North with 54-4 and 54-2 signs attached.

Set steel fence post approximately 5 feet West with 54-2 sign attached.

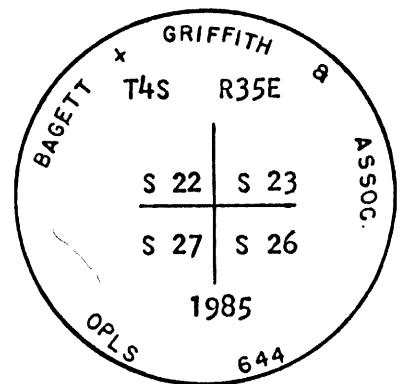

Corner set 9/30/85

Witness: None

REGISTERED PROFESSIONAL LAND SURVEYOR

OREGON JULY 10, 1964
DUANE I. GRIFFITH
644

Brass washer nailed to BT blaze. Used steel tape and magnetic compass with 20° East declination. Measured to 50d spike set in right side of tree when facing tree, unless otherwise stated.

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....

(COUNTY OFFICIAL)

UNION COUNTY SURVEYOR

(DEPUTY)

Form R6-7100-57 (9/71)

☆ U.S. GOVERNMENT PRINTING OFFICE • 1983-793-276

Date Received 12-5-85

R 17

Date Filed 12-6-85

By G. LANGLITZ DEPUTY

File No. 169-85 R