


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment: Corner established by Rufus S. Moore under General Land office contract no. 451, dated June 12, 1882. Surveyor General Records states:

Set a post 3 feet long 3 inches square 24 inches in the ground for 1/4 section corner, marked 1/4 S on North face, from which:

A pine 36" in diameter bears N15°E, 171ks dist. marked 1/4 S BT

A Pine 30" in diameter bears S3°E, 67 1ks. distant, marked 1/4 S BT



No record of subsequent remonumentation was found in County Records.

Description of corner evidence found:

NONE

UNION COUNTY SURVEYOR

Date Received 12-5-85

Date Filed 12-6-85

By G. LANGLITZ, DEPUTY

File No. 170-85 R

See map of survey dated November 1985.

Description of monument and accessories I established to perpetuate the original location of this corner: At proportionate distance I set a 2 1/2" x 30" aluminum pipe with aluminum cap marked as shown, 24 inches in the ground with surrounding mound of dirt, from which:


A 12" diameter Douglas Fir bears N27°E, 22.45 feet, marked 1/4 S 23 BT

A 27" Ponderosa Pine bears S79°E, 37.02 feet, marked 1/4 S 26 BT.

Set a steel fence post approximately 5 feet East with 54-4 sign attached.

Corner set 10/9/85

Witness: Greg Blackman, Rick Robinson

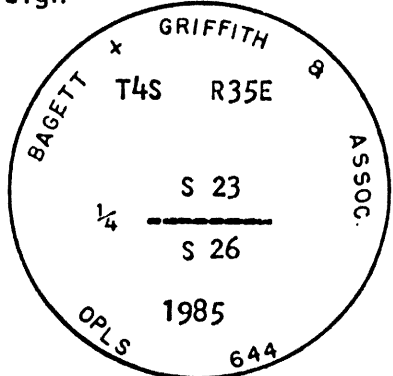

REGISTERED PROFESSIONAL LAND SURVEYOR

OREGON
JULY 10, 1964
DUANE I. GRIFFITH
644

Brass washer nailed to BT blaze. Used steel tape and magnetic compass with 20° East declination. Measured to 50d spike set in right side of tree when facing tree, unless otherwise stated.

Office of..... County of.....

State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....

..... by (COUNTY OFFICIAL) (DEPUTY)