


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment: Corner established by Rufus S. Moore under General Land office contract no. 451, dated June 12, 1882. Surveyor General Records states: Set a post 3 feet long 3 inches square, 24 inches in the ground for 1/4 section corner, marked 1/4 S on North face, from which:

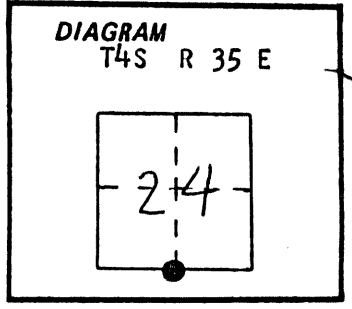

A Pine 26 inches in diameter bears N 35° E, 189 lks. dist, marked 1/4 S BT.

A Pine 48 inches in diameter bears S76°E, 223 lks. dist, marked 1/4 S BT.

No record of subsequent remonumentation was found in County Records.

Description of corner evidence found:

Found a 40" Ponderosa Pine snag with scribes visible for SE BT.

No sign of the NE BT. There is a mound of dirt at the position, it appears to have been pushed up by a dozer.

See map of survey dated November 1985.


Description of monument and accessories I established to perpetuate the original location of this corner: At record bearing and distnace from the found BT, I set a 2 1/2"x30" aluminum pipe with aluminum cap marked as shown, 18 inches in the ground with surrounding mound of stone, from which:

A 13 inch Ponderosa Pine bears N35°E, 29.63 feet, marked 1/4 S24 BT.

A 15 inch Ponderosa Pine bears S59°E, 26.96 feet, marked 1/4 S25 BT.

I set a steel fence post approximately 5 feet East with a 54-4 sign attached.

Corner set 10/4/85
Witness: Rick Robinson

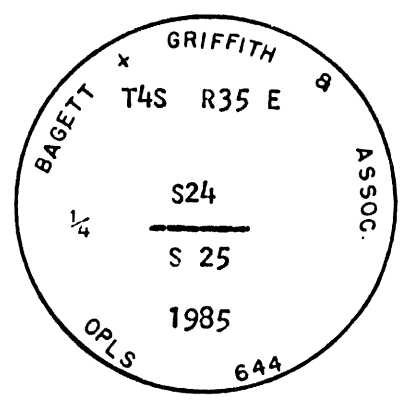

REGISTERED PROFESSIONAL LAND SURVEYOR

OREGON JULY 10, 1964 DUANE I. GRIFFITH 044

Brass washer nailed to BT blaze. Used steel tape and magnetic compass with 20° East declination. Measured to 50d spike set in right side of tree when facing tree, unless otherwise stated.

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....

UNION COUNTY SURVEYOR (COUNTY OFFICIAL) (DEPUTY)
Date Received 12-5-85
Date Filed 12-6-85
By G. LANGRIZ, DEPUTY
File No. 172-85 R