


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

X-9

History of original corner establishment: Corner established by Rufus S. Moore under General Land office contract no. 451, dated June 12, 1882. Surveyor General Records states:
Set a basalt stone 18"x12"x4", 12 inches in the ground for 1/4 section corner, marked 1/4 on W face and raised a mound of stone alongside, from which:

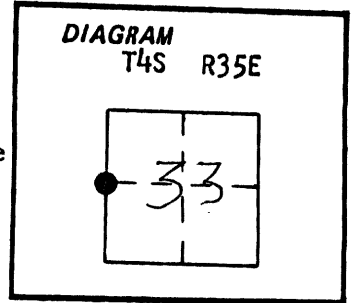

A Pine 40" in diameter bears N66°W, 325 lks. dist. marked 1/4 S BT

No record of subsequent remonumentation was found in County Records.
Description of corner evidence found:

Found mound of stone marked stone not identified.

Found a 40" Ponderosa Pine N64°W, 214.5 feet, scribes visible. BT is a pine snag.

See map of survey dated November 1985.

Description of monument and accessories I established to perpetuate the original location of this corner:

In mound of stone I set a 2 1/2"x30" aluminum pipe with aluminum cap marked as shown 20" in the ground with surrounding mound of stone, with a 5 foot base to top of cap, from which:

A 14" Ponderosa Pine bears S49°E, 65.03 feet marked 1/4 S 33 BT

A 12" Ponderosa Pine bears S83°W, 167.50 feet, marked 1/4 S 32 BT


Set steel fence post approximately 5 feet North.

Corner set 10/21/85

Witness: Stratton French

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
JULY 10, 1984
DUANE I. GRIFFITH
644

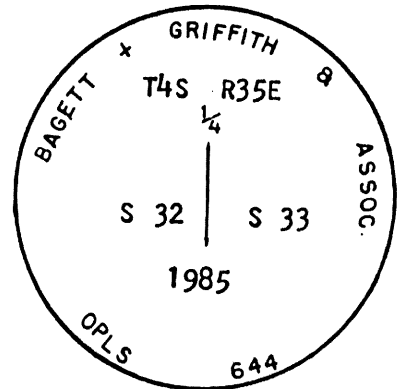

Brass washer nailed to BT blaze.
Used steel tape and magnetic compass with 20° East declination. Measured to 50d spike set in right side of tree when facing tree, unless otherwise stated.

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....

(COUNTY OFFICIAL)

UNION COUNTY
SURVEYOR

(DEPUTY)

orm R6-7100-57 (9/71)

Date Received 12-5-85

Date Filed 12-6-85

By G. LANGLITZ, DEPUTY

File No. 175-85 R

☆ U.S. GOVERNMENT PRINTING OFFICE - 1983-793-276

X 9