


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by Herman D. Gradon under GLO contract number 452, dated June 16, 1882. Surveyor General record states:

Set a basalt stone 15x10x6 ins 10 ins in the ground for 1/4 sec cor marked 1/4 on S face from which;

A pine 8 in diam bears S30°W 25 lks dist marked 1/4 S BT  
I also raise a mound of stone S of cor.

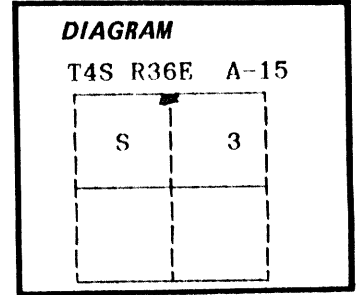

No record of subsequent monumentation found in Union County survey records.

Description of corner evidence found:

Found a rock crib with fencelines South and West, with many stones of call size in the crib.

Found a Ponderosa Pine stump S40°W, 35 feet, uprooted, loose on the ground, unable to determine the point of origin.

Found a 18 inch long slab of Ponderosa Pine wood loose on the ground near the rock crib with BT scribes and chaining notch visible.

I accept the rock crib as the best available evidence of the original GLO corner.

See Union County Survey Number 25-89

Description of monument and accessories I established to perpetuate the original location of this corner:

At the Northeast corner of the rock crib, I set a 2 1/2" x 30" aluminum pipe with aluminum cap marked as shown, 29 inches in the ground, from which;

New Bearing Trees;  
A 17 inch diameter Ponderosa Pine bears N48°E, 102.44 feet marked X BT  
A 20 inch diameter Ponderosa Pine bears S67°E, 92.92 feet marked 1/4 S3 BT  
NO OTHER TREES AVAILABLE TO THE SOUTH


Raised a mound of stone around monument, 2 ft. base to top of cap.

Painted a 6 inch red band around all BTs and attached Bearing Tree and Land Survey Monument signs.

Set a steel fencepost approximately 5 feet North with Land Survey Monument sign attached.

I hereby certify that the above corner point was perpetuated as hereon described on September 30, 1989.

Witnesses: Rick Robinson and Jeff Petersen

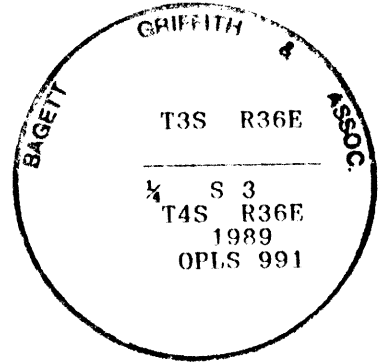

**REGISTERED  
PROFESSIONAL  
LAND SURVEYOR**

*Gregory T. Blackman*

**OREGON**  
JULY 13, 1973  
**GREGORY T. BLACKMAN**  
991

I used a steel tape and magnetic compass in the establishment of new accessories. I used 17° magnetic declination. The distances are to a 50d spike driven in the right side of the root crown. I attached a brass washer marked OPLS 991 to the BT blaze.

Office of..... County of.....  
State of....., I hereby certify that the within instrument was filed in this office  
for record on the..... day of....., 19.....

(COUNTY OFFICIAL) **UNION COUNTY SURVEYOR** (DEPUTY)

Form R6-7100-57 (9/71)

☆ U.S. GOVERNMENT PRINTING OFFICE - 1983-793-276

Date Received 11-14-89  
Date Filed 11-14-89  
By R. ROBINSON DEPUTY  
File No. 209-89A