


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by Herman D. Gradon under GLO contract number 452, dated June 16, 1882. Surveyor General record states:

Set a basalt stone 17x12x10 ins 11 ins in the ground for cor to secs 5, 6, 7 & 8 marked with 5 notches on S and E edges from which;

- A pine 26 ins diam bears N70°E 42 lks dist marked T4S R36E S5 BT
- A pine 10 ins diam bears S40°E 87 lks dist marked T4S R36E S8 BT
- A pine 20 ins diam bears S35°W 43 lks dist marked T4S R36E S7 BT
- A pine 14 ins diam bears N30°W 33 lks dist marked T4S R36E S6 BT

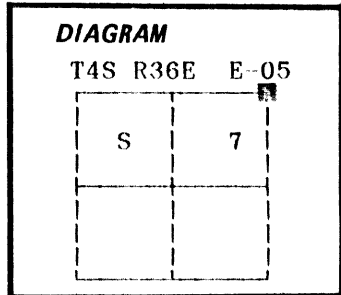

No record of subsequent monumentation found in Union County survey records.

Description of corner evidence found:

Found no evidence of the original corner monument.

Found a rotted Ponderosa Pine stump N76°E, (Record N70°E), 42 lks, no marks visible.

Found a rotted Ponderosa Pine stump S40°E, 87 lks, laying on ground with axe marks visible.

Found a stump hole S35°W, 43 lks.

Found a 20 inch diameter Ponderosa Pine N30°W, 33 lks, alive but dying with scribes visible.

Description of monument and accessories I established to perpetuate the

original location of this corner: At record distance from the Northwest and Northeast bearing trees, I set a 2½" x 30" aluminum pipe with aluminum cap marked as shown, 24 inches in the ground, from which;

New Bearing Trees;

- A 23 inch diameter Ponderosa Pine bears N85°E, 68.52 feet marked T4S R36E S5 BT
- A 15 inch diameter Ponderosa Pine bears S36°E, 46.68 feet marked T4S R36E S8 BT
- A 19 inch diameter Ponderosa Pine bears S44°W, 34.39 feet marked T4S R36E S7 BT
- A 16 inch diameter Ponderosa Pine bears N84°W, 15.27 feet marked T4S R36E S6 BT. (measured to nail with white insulator)


Raised a mound of stone around monument, 3 ft. base to top of cap.

Painted a 6 inch red band around all BTs and attached Bearing Tree and Land Survey Monument signs.

Set a steel fencepost approximately 10 feet North with Land Survey Monument attached.

I hereby certify that the above corner point was perpetuated as hereon described on September 28, 1989.

Witness: Jeff Petersen

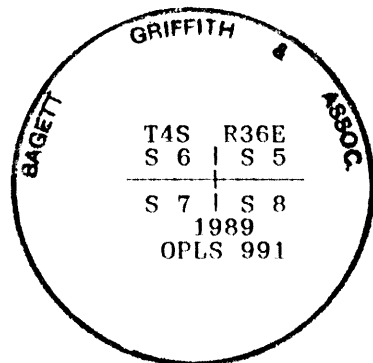

**REGISTERED
PROFESSIONAL
LAND SURVEYOR**

Gregory T. Blackman

OREGON
JULY 13, 1973
GREGORY T. BLACKMAN
991

I used a steel tape and magnetic compass in the establishment of new accessories. I used 17° magnetic declination. The distances are to a 50d spike driven in the right side of the root crown. I attached a brass washer marked OPLS 991 to the BT blaze.

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office
for record on the..... day of.....

**UNION COUNTY
SURVEYOR**

(COUNTY OFFICIAL) (DEPUTY)

Form R6-7100-57 (9/71)

Date Received 11-14-89 ☆

Date Filed 11-14-89

By R. ROBINSON, DEPUTY

File No. 211-89R

U.S. GOVERNMENT PRINTING OFFICE - 1983-793-276