


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by Herman D. Gradon under GLO contract number 452, dated June 16, 1882. Surveyor General record states:

Set a basalt stone 14x8x5 ins 9 ins in the ground for cor to secs 2, 3, 10 & 11 marked with 5 notches on S and 2 notch on E edges from which;

- A pine 22 ins diam bears N35°E 124 lks dist marked T4S R36E S2 BT
- A pine 12 ins diam bears S50°E 100 lks dist marked T4S R36E S11 BT
- A pine 20 ins diam bears S30°W 70 lks dist marked T4S R36E S10 BT
- A pine 18 ins diam bears N75°W 246 lks dist marked T4S R36E S3 BT

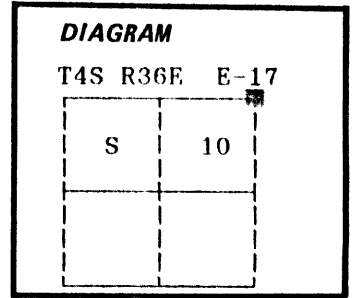

No record of subsequent monumentation found in Union County survey records.

Description of corner evidence found:

Found a stone 12x12x6 inches marked with 5 visible grooves.

Found a 15 inch diameter Ponderosa Pine stump N37°E (Record N35°E), 94.1 feet (Record 124 lks), rotted with scribes visible.

Found a 18 inch diameter Ponderosa Pine S60°E (Record S50°E), 100 lks, alive and vigorous with blaze evident.

Found a rotted Ponderosa Pine stump S30°W, 70 lks, with scribes visible.

Found a 10 inch diameter Ponderosa Pine stump N68°W (Record N75°W), 246 lks, rotted with partial scribes visible.

Description of monument and accessories I established to perpetuate the original location of this corner:

In place of the found original corner stone and at record distance from the Southeast, Southwest and Northwest BTs, I set a 2 1/2" x 30" aluminum pipe with aluminum cap marked as shown, 15 inches in the ground, from which;

New Bearing Trees:

- A 13 inch diameter Ponderosa Pine bears N26°E, 11.14 feet marked T4S R36E S2 BT
- A 10 inch diameter Ponderosa Pine bears S11°W, 67.97 feet marked T4S R36E S10 BT
- A 13 inch diameter Ponderosa Pine bears N62°W, 22.69 feet marked T4S R36E S3 BT


Raised a mound of stone around monument, 3 ft. base to top of cap. Buried the original corner stone North and alongside monument.

Painted a 6 inch red band around all BTs and attached Bearing Tree and Land Survey Monument signs.

Set a steel fencepost approximately 5 feet North with Land Survey Monument sign attached.

I hereby certify that the above corner point was perpetuated as hereon described on September 28, 1989.

Witness: Jeff Petersen

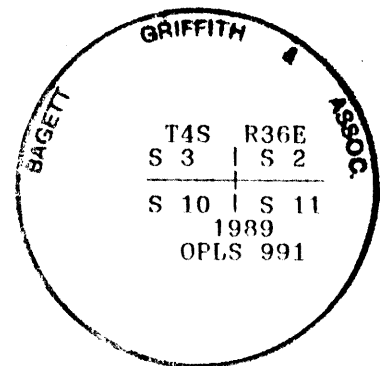

REGISTERED PROFESSIONAL LAND SURVEYOR

Gregory T. Blackman

OREGON
JULY 13, 1973
GREGORY T. BLACKMAN
991

I used a steel tape and magnetic compass in the establishment of new accessories. I used 17° magnetic declination. The distances are to a 50d spike driven in the right side of the root crown. I attached a brass washer marked OPLS 991 to the BT blaze.

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....

(COUNTY OFFICIAL) **UNION COUNTY SURVEYOR** (DEPUTY)

Form R6-7100-57 (9/71)

U.S. GOVERNMENT PRINTING OFFICE - 1983-793-276

Date Received 11-14-89
Date Filed 11-14-89
By R. ROBINSON, DEPUTY
File No. 213-89R